


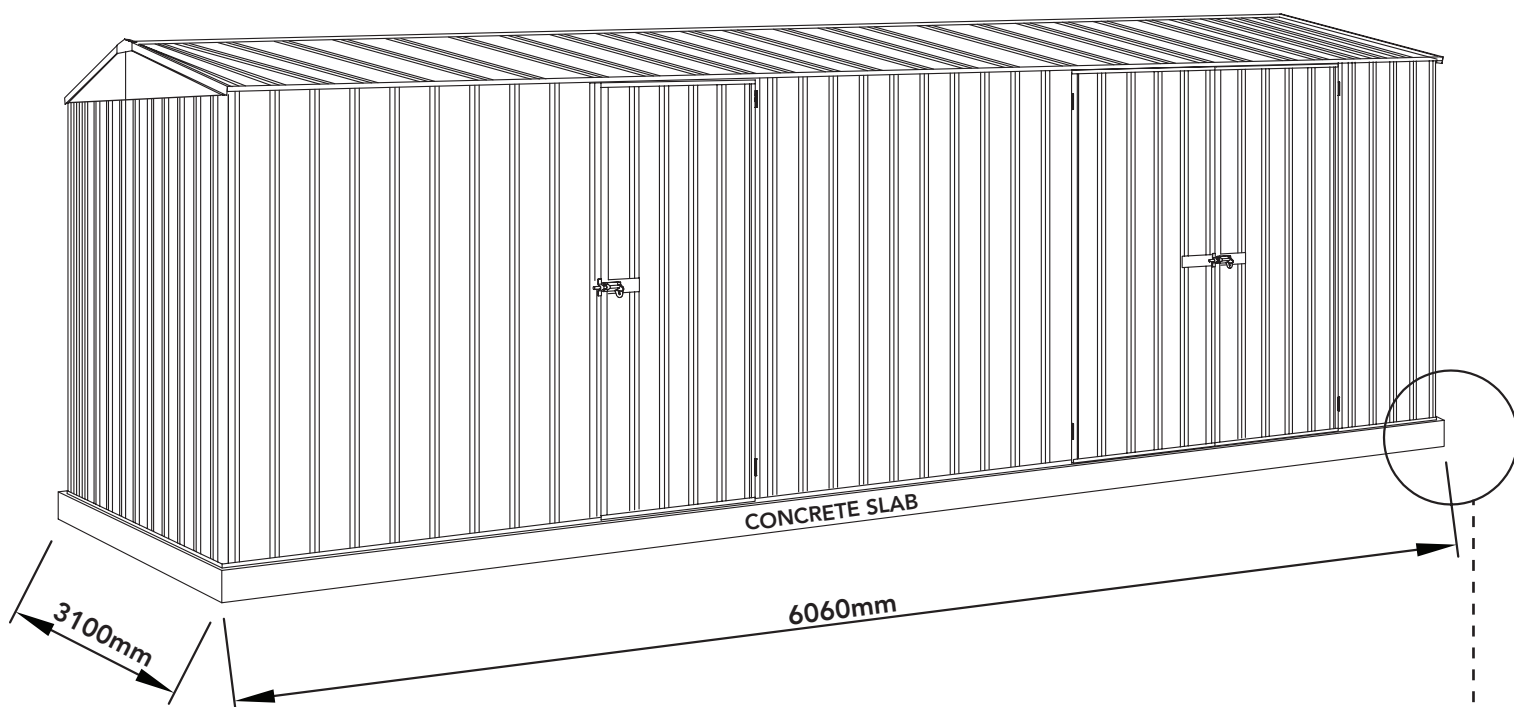


For construction in non-cyclonic areas


Wind rating: N2 as per AS4055-2021.

If you require a higher wind rating please contact us: admin@absco.com.au or 1800 029 701

NOTE: This shed can be upgraded to wind rating: C1 as per AS4055-2021 with the additional purchase of a Cyclone Kit.

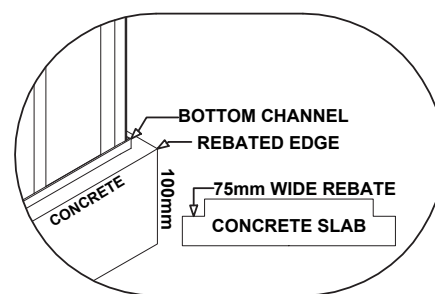

When laying concrete slab, ensure there is a rebated edge 25mm deep around the perimeter. This will help water egress from the base of the shed.

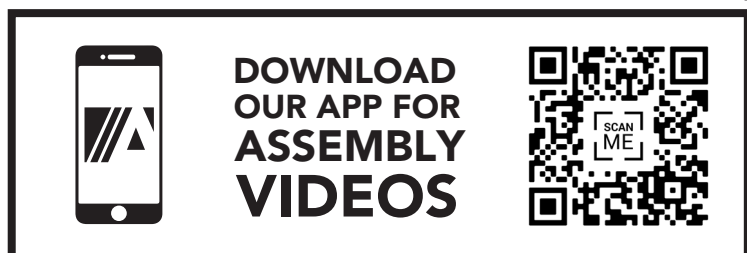

PLEASE LEAVE A REVIEW

Tell us about your experience!
Visit www.absco.sheds.com.au/review


GENERAL INSTRUCTIONS

- Before commencing any assembly, read through these instructions in detail to gain a thorough understanding of assembly methods and associated details.
- Unpack the carton and carefully identify and check off all the parts against the parts described and illustrated on "COMPONENTS PACKING LIST" pages.
- Local authority approval must be obtained prior to construction of the shed. Once you have selected your site you will need to lodge a site plan to your local council.

SITE PREPARATION

- The site for the shed must be level. An uneven surface may result in misalignment of parts.
- The shed shall be erected on top of a reinforced concrete slab and anchored down appropriately illustrated on "FINAL CONSTRUCTION" page. **If using a rebated slab ensure that all frame uprights are trimmed 25mm.**


TOOLS REQUIRED

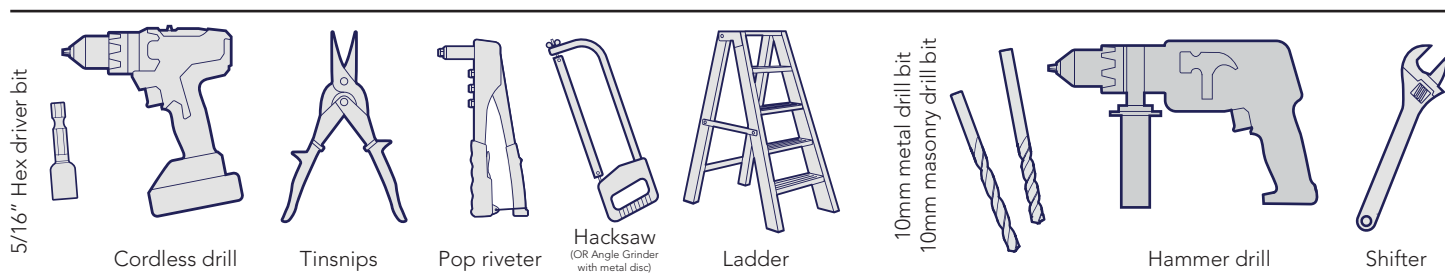

SAFETY NOTES




- Some parts may have sharp edges. It is advisable to wear gloves when handling these items and safety glasses if drilling holes. Sensible shoes are highly recommended.
- Do not erect your shed in windy conditions.
- It is highly recommended to erect the shed with two or more people.
- Do not sit, stand or walk on the roof of your shed.

RECOMMENDED



COMPONENT PACKING LIST

Check off all components.










MAIN PACK CARTON (PACK 1 OF 2)							
QTY	COMPONENT DESCRIPTION	PART NO.	CHK	QTY	COMPONENT DESCRIPTION	PART NO.	CHK
1	 STEEL SHEET 1974mm X 773mm	E		2	 GABLE L/H L = 1475mm	16L	
2	 STEEL SHEET 1974mm X 773mm	F		2	 GABLE R/H L = 1475mm	16R	
16	 STEEL SHEET 1546mm X 773mm	45A		4	 BRACE L = 393mm	13A	
2	 STEEL SHEET 2034mm X 731mm	H33		3	 RIDGE BEAM JOINER L = 450mm	ZARSP	
1	 STEEL SHEET 2034mm X 711mm	H34		2	 RIDGE BEAM L = 1521mm	97AL	
1	 STEEL SHEET 2034mm X 711mm	H35		2	 RIDGE BEAM L = 1521mm	97AR	
1	CHANNEL SET (SEE PAGES 4 & 5)			1	FITTINGS & ACCESSORIES PACKET (SEE PAGES 5 & 6)		

Nominal sheet widths are shown. +/- 2mm is within tolerance.















COMPONENT PACKING LIST

Check off all components.

CHANNEL SET (IN MAIN PACK 1 OF 2)

QTY	COMPONENT DESCRIPTION	PART NO.	CHK	QTY	COMPONENT DESCRIPTION	PART NO.	CHK
6	 CHANNEL L = 1496.5mm	81AL		6	 CHANNEL L = 1496.5mm	81AR	
4	 CHANNEL L = 1496.5mm	60AL		4	 CHANNEL L = 1496.5mm	60AR	
1	 CHANNEL WITH HINGES L = 1974mm	HC1		2	 CHANNEL L = 1974mm	HC2	
1	 CHANNEL L = 1568mm	79A		1	 CHANNEL L = 783mm	79B	
6	 CHANNEL L = 773mm	58C					






NOTCHED CHANNEL

1	 CHANNEL L = 1496.5mm	55AL			 CHANNEL L = 1496.5mm	55AR	
2	 CHANNEL L = 1496.5mm	55BL			 CHANNEL L = 1496.5mm	55BR	
1	 CHANNEL L = 1496.5mm	55CL			 CHANNEL L = 1496.5mm	55CR	
1	 CHANNEL L = 1496.5mm	56AL			 CHANNEL L = 1496.5mm	56AL	
1	 CHANNEL L = 1496.5mm	56BL			 CHANNEL L = 1496.5mm	56BL	
2	 CHANNEL L = 1496.5mm	77BL			 CHANNEL L = 1496.5mm	77BL	
2	 CHANNEL L = 1496.5mm	81BL			 CHANNEL L = 1496.5mm	81BL	

COMPONENT PACKING LIST













Check off all components.

CHANNEL SET (IN MAIN PACK 1 OF 2)

QTY	COMPONENT DESCRIPTION	PART NO.	CHK	QTY	COMPONENT DESCRIPTION	PART NO.	CHK
3	 JAMB L = 2034mm	HJ1		1	 JAMB L = 788mm	90B	
1	 JAMB L = 2034mm	HJ2		6	 JAMB L = 1120mm	91A	
1	 JAMB L = 1974mm	HJ3		4	 LIP TRIM L = 1546mm	87A	
1	 JAMB L = 1598mm	90A					
FITTINGS ACCESSORIES AND PACKET CONTENT							
2	 CAP GABLE L = 170mm	14A		24	 HEX HD TEK SCREW W/ NEO WASHER 10-16x16mm	FAST 033	
3	 DOOR STRAP L = 165mm	12A		4	 RIDGE PLATE	RBP	
1	 RIDGE CAP JOINER	98A		20	 CHANNEL JOINER L = 200mm	CSJ	
9	 3.2x8mm BLIND POP RIVETS	FAST 009		1	ASSEMBLY INSTRUCTION MANUAL		
1	PSTKSGL SINGLE DOOR FITTINGS PACK			1	PSTKDBL DOUBLE DOOR FITTINGS PACK		

COMPONENT PACKING LIST










Check off all components.

QTY	COMPONENT DESCRIPTION	PART NO.	CHK	QTY	COMPONENT DESCRIPTION	PART NO.	CHK
PSTKSGL - SINGLE DOOR FITTINGS PACK							
1	 DOOR PADBOLT	FAST 006		1	 PADBOLT HASP	FAST 007	
1	 3mm DRILL BIT	DRILL		1	 PHILLIPS DRIVER BIT	FAST 038	
1	 8G x 10 mm SELF TAPPING SCREW PACK 220	FAST 001		6	 3.2x8mm POP RIVETS	FAST 009	
6	 3/16" COUNTER SUNK SCREWS	FAST 004		6	 3/16" COUNTER SUNK NUTS	FAST 005	
PSTKDBL - DOUBLE DOOR FITTINGS PACK							
3	 DOOR PADBOLT	FAST 006		2	 PADBOLT HASP	FAST 007	
1	 3mm DRILL BIT	DRILL		1	 PHILLIPS DRIVER BIT	FAST 038	
1	 8G x 10 mm SELF TAPPING SCREW PACK 220	FAST 001		12	 3.2x8mm POP RIVETS	FAST 009	
8	 3/16" ROUND HEAD BOLTS	FAST 002		8	 3/16" ROUND NYLOC NUTS	FAST 003	
12	 3/16" COUNTER SUNK SCREWS	FAST 004		12	 3/16" COUNTER SUNK NUTS	FAST 005	

Nominal sheet widths are shown. +/- 2mm is within tolerance.

COMPONENT PACKING LIST

Check off all components.

MAIN PACK CARTON (PACK 2 OF 2)							
QTY	COMPONENT DESCRIPTION	PART NO.	CHK	QTY	COMPONENT DESCRIPTION	PART NO.	CHK
10	 STEEL SHEET 2034mm X 773mm	H31		1	HIGH MID FRAME PACK (SEE BELOW)	HMF	
7	 STEEL SHEET 2034mm X 773mm	H30					
HIGH MID-FRAME CONTENTS (80mm x 40mm CHANNEL SECTIONS)							
4	 CHANNEL L = 1484mm	C1484		4	 CHANNEL L = 1954mm	C1954	
HIGH MID-FRAME FITTINGS PACK							
4	 KNEE PLATE	ZACO 193		8	 DYNABOLT	FAST 015	
4	 APEX PLATE	ZACO 194		300	 16mm TEK SCREWS	PACK WAFER 150	
4	 MULTI PURPOSE BRACKET	BKT 17					


Nominal sheet widths are shown. +/- 2mm is within tolerance.

SNAPTITE ASSEMBLY GUIDE

The Snaptite Assembly System locks end channels to all roof and wall sheets without the need for tools and fasteners.

To assemble each panel, the perimeter channels are secured to the top and bottom of each panel. Gently tap the channel over the SNAPTITE lugs on the sheet, working along the sheet.

Each perimeter channel must finish flush with the edges of the sheets. Simply tap the channel along the sheets until each end is neatly flush. If you need to remove channels from the panels, slide it off from the side.

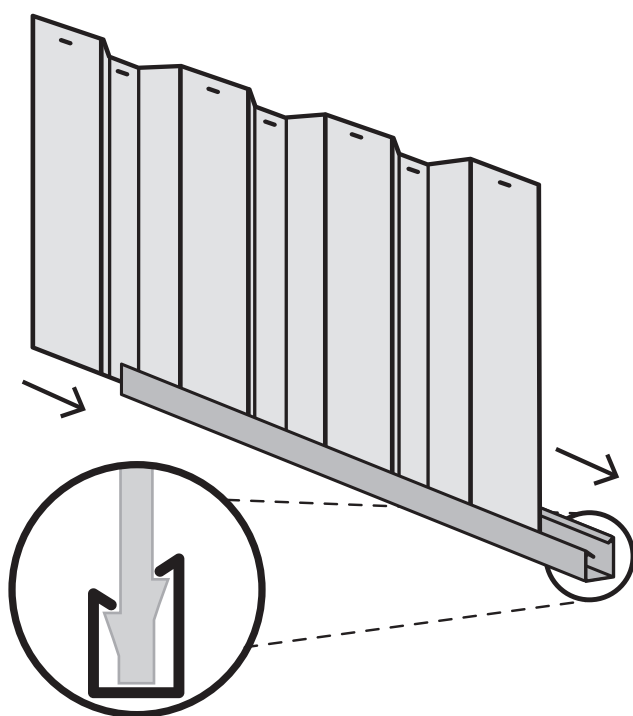

SNAPTITE
World's Easiest Assembly System
UNIQUE PATENTED SYSTEM

Channel locks the shed panel into position without the need for screws!


FASTENING SYMBOLS

SNAPTITE

Secure channel to sheeting by SNAPTITE fastening method.



Join components together with one screw at this location only, as some channels have extra holes that are not required for this model of shed.



Do not join components together at this location yet, as the screws may obstruct further assembly of the other components.



Join components together by pre-drilling the holes first. Use one component as template to mark where the holes are and drill with a 3mm drill bit.



3mm pop rivet



4mm nut and bolt set.


Guide on Joining Spliced Channels

The text marked on all parts must be shown on the same side as each other




Step 1.

Position the channels and the CSJ joiner so the centre of the CSJ is in line with the end of each channel to be joined together.

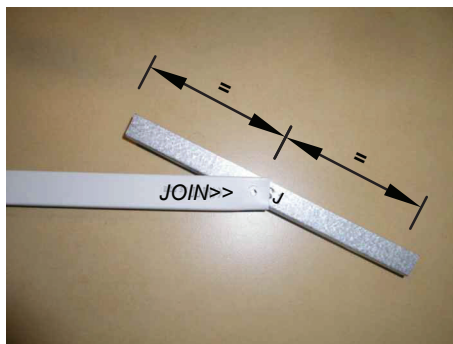


Step 2.

Join the first channel to the CSJ by inserting the centre of the CSJ, on an angle, to the end of the channel where the JOIN>> text is marked.

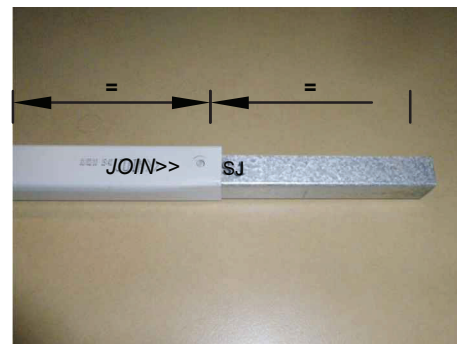


Push down one side of the CSJ until you hear a 'click'.

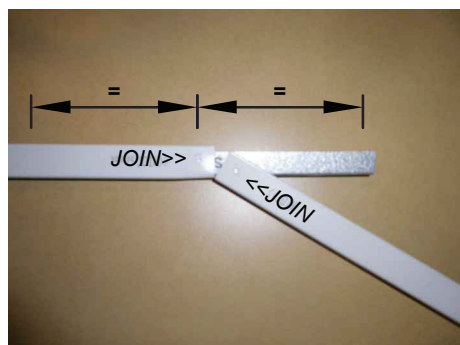

Step 3.


Join the second channel to the CSJ by positioning the <<JOIN of the channel at the centre of the CSJ, on an angle. Push the CSJ into the channel until you hear a 'click'.

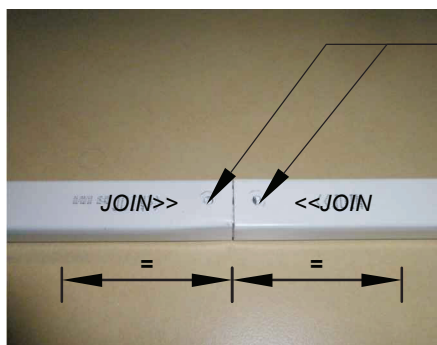


Finished Channel.

The joined channels should now look like the picture with the CSJ positioned equally inside of the joined channels.

Drill out holes with 3mm drill bit in CSJ to match the holes in channel. Drilling of screws on the joined channels is being done after sheets are locked on the spliced channels.

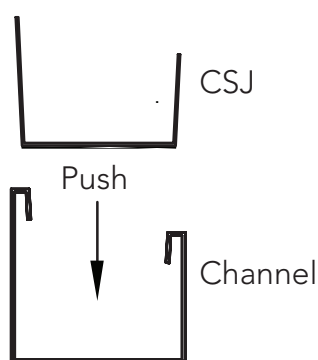

...

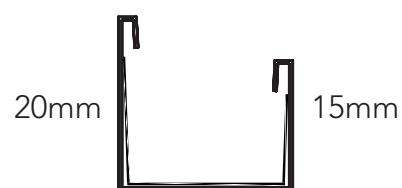


Finished Spliced Channel

PRE-ASSEMBLY OF SPLICED CHANNELS

Join together 40 x channel sections using 20 x channel joiners (Part CSJ)


NOTE: Some channels may have holes in them - You will need to redrill holes where CSJ joining channel covers them.

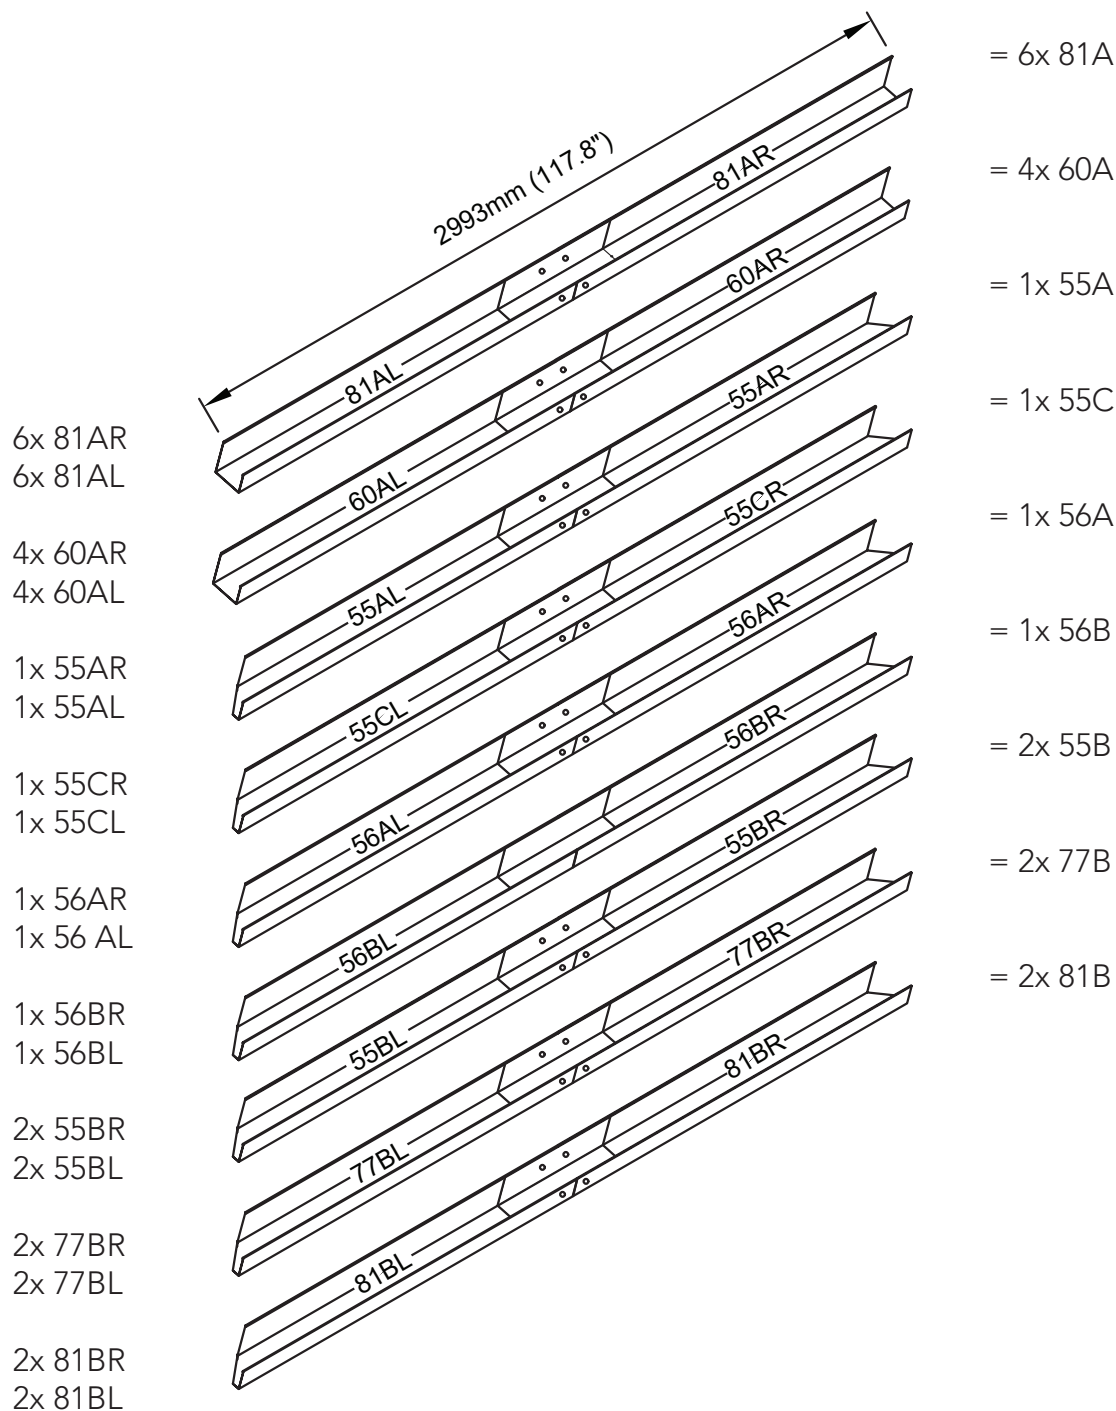


Guide on Joining a Spliced Ridge Beam

Follow these three steps to assemble a ridge beam.


If present, remove plastic coating from top side of ridge beam capping before assembly.

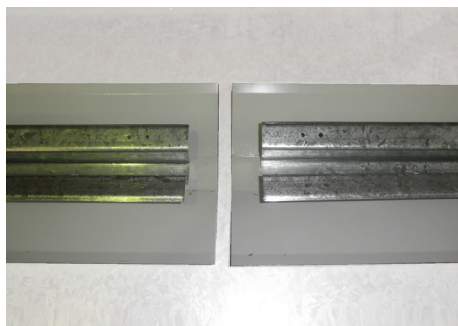

Step 1.
Place two ridge beams as shown and push them together. Slide the cap of one under the other.

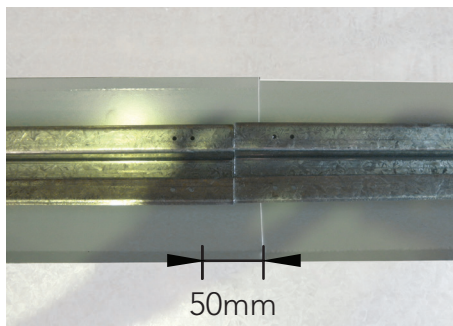

NOTE.
There is a 50mm overlap of the ridge caps when the beams are in position.

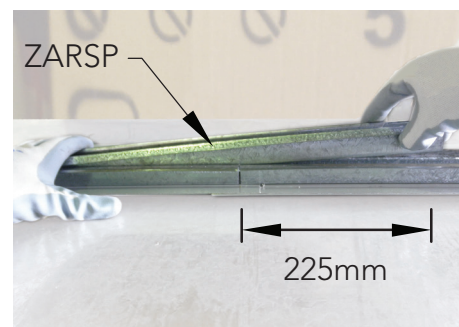

Step 2.
Use the ZARSP to connect at the centre of the two ridge beams. Be sure it is pushed in fully.



Step 3.
Turn over the ridge beam. Measure 250mm from the middle along the centre of one ridge beam, mark spacings of 50mm. Fasten with a Tek screw at each marking.



Repeat to the other side of the ridge beam assembly.

TIP: Predrilling each hole with the 3mm drill bit makes it easier to fasten.





Finished Spliced Ridge Beam



Hex Driver Bit




Hex Hd Self-drilling tek screw with neoprene washer

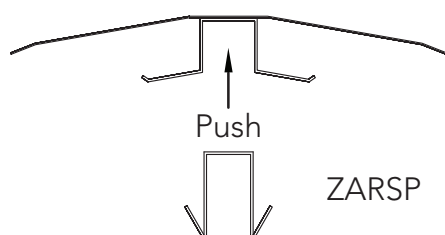



Finished
Joined Ridge Beams

PRE-ASSEMBLY OF SPLICED RIDGE BEAM

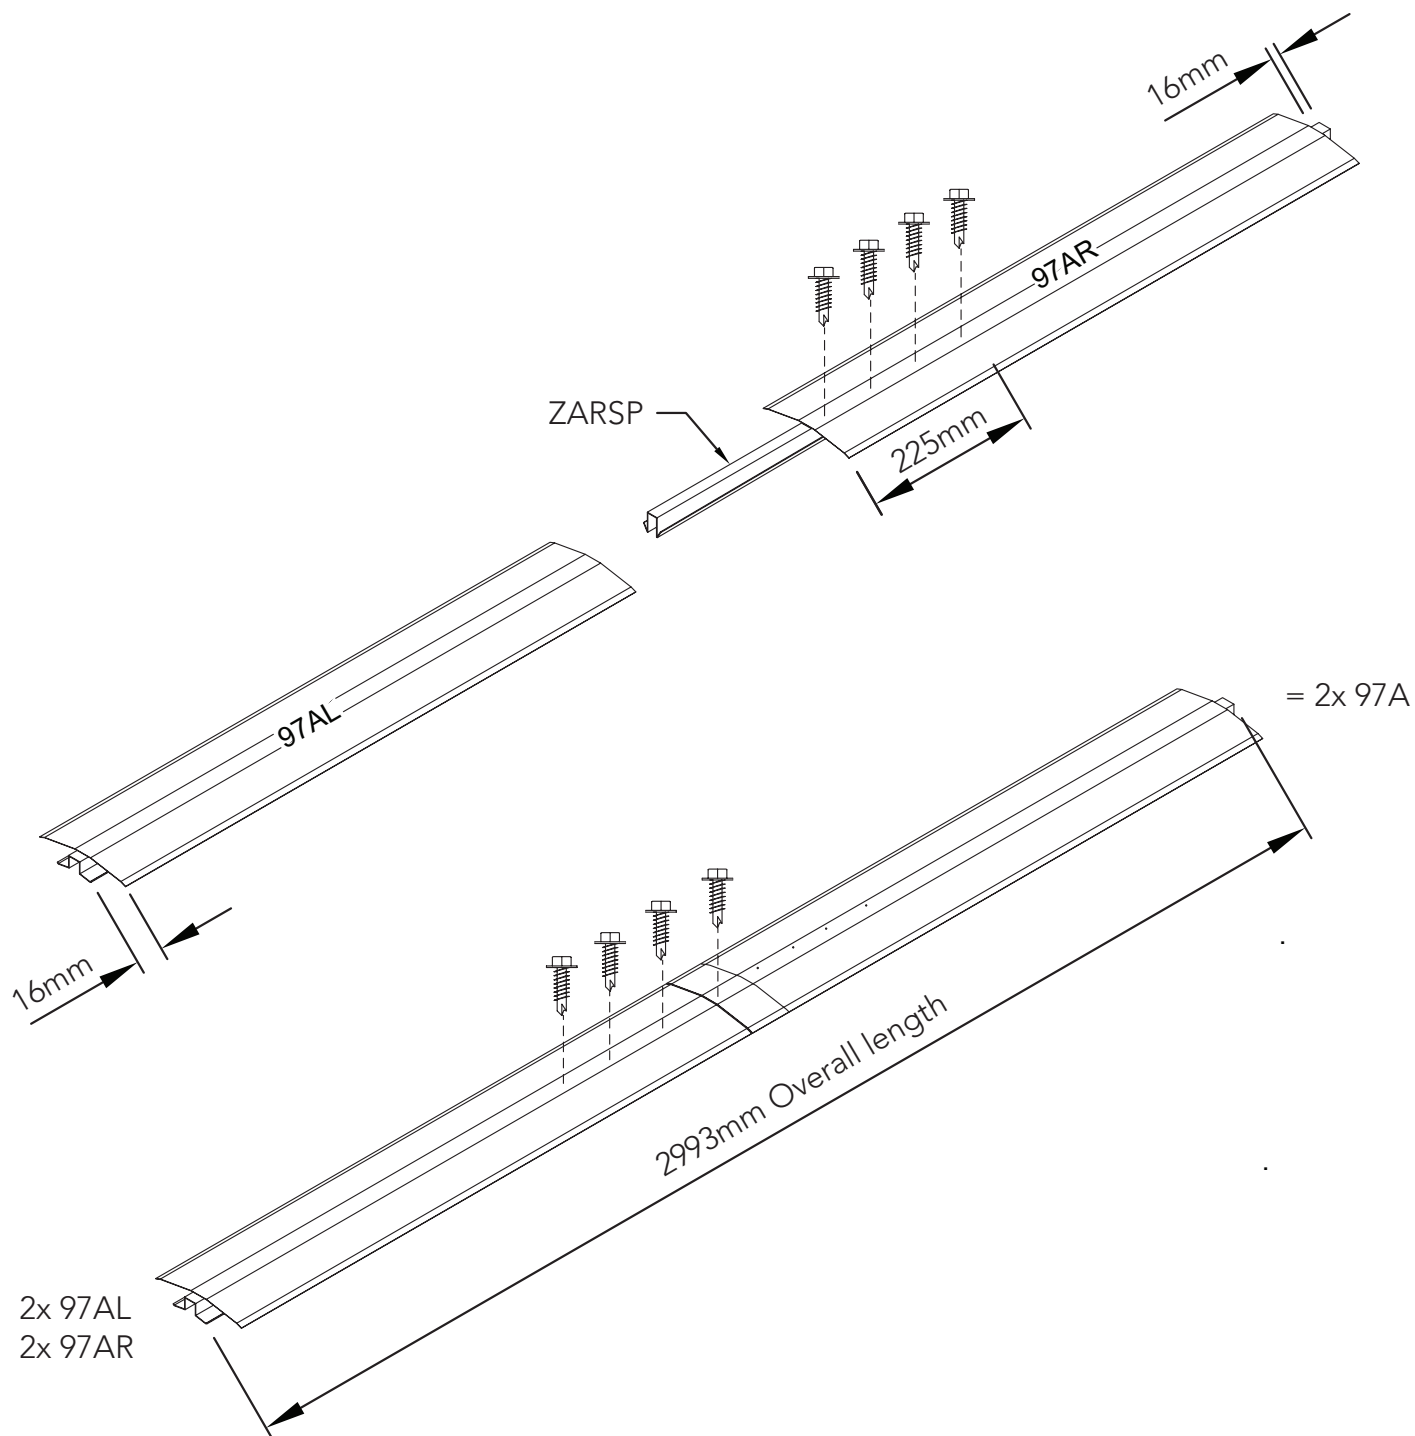

JOINING RIDGE BEAMS


To make the total span we must now join the two ridge beams

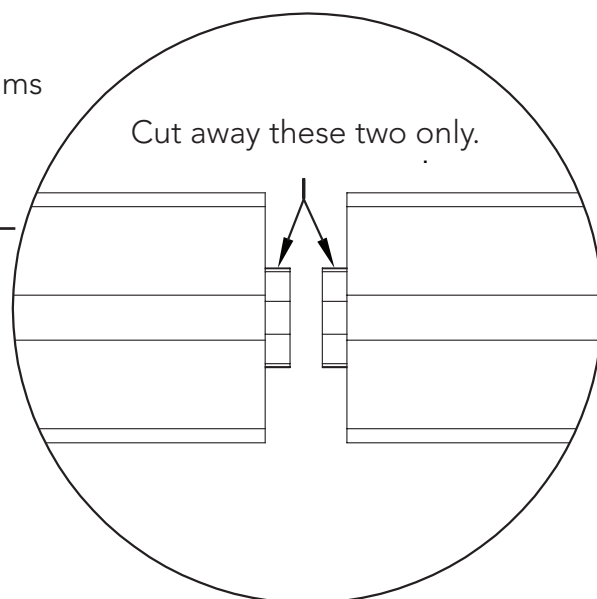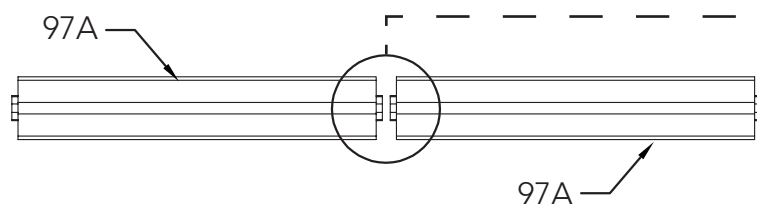

Using a hacksaw, remove one protruding section of each ridge beam, this will allow the sections to butt up neatly to each other.

Insert the ZARSP at an equal distance into each ridge beam. Confirm that the beam is straight with a string line before fastening with self drilling screws.



The ZARSP is a very tight fit, tap into place with a hammer.

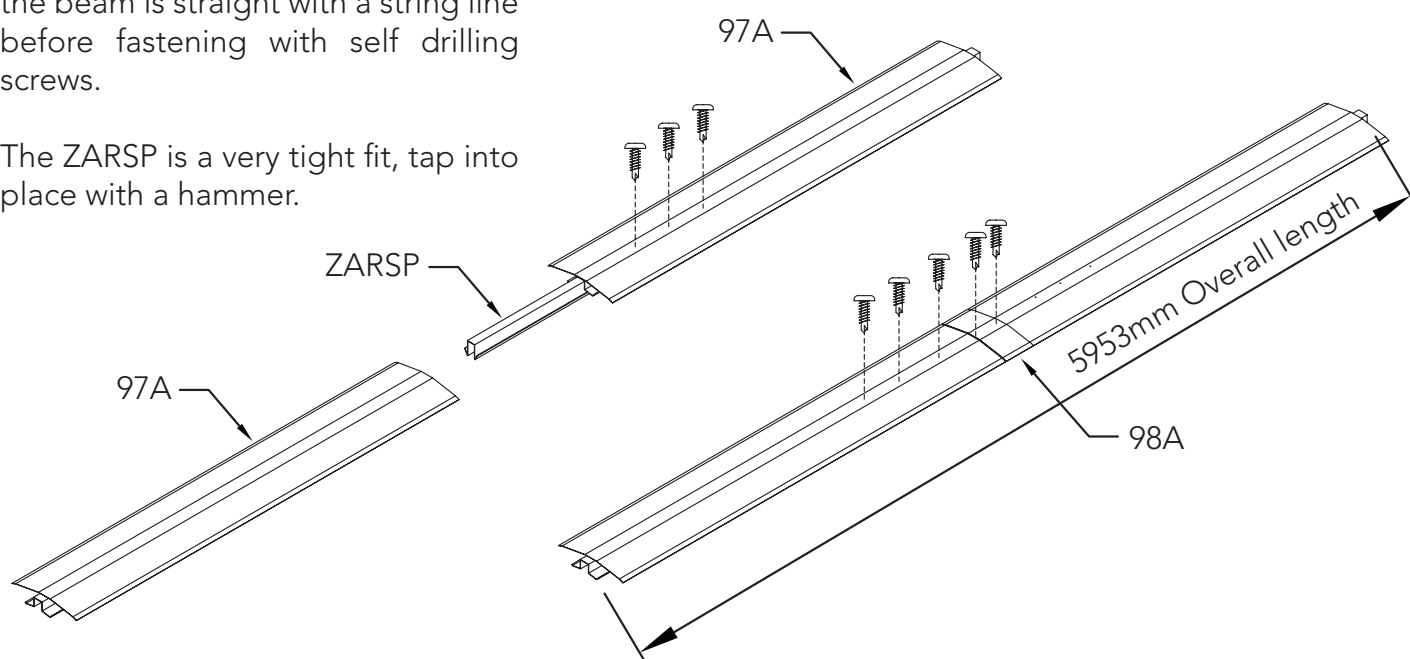

Hex Driver Bit




Hex Hd Self-drilling tek screw
with neoprene washer

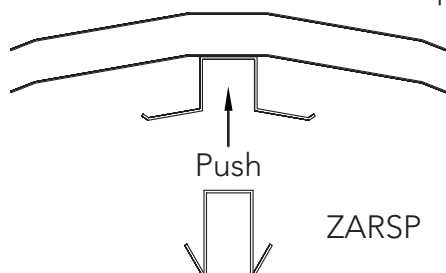


Finished
Joined Ridge Beams

OVERVIEW OF ROOF COMPONENTS

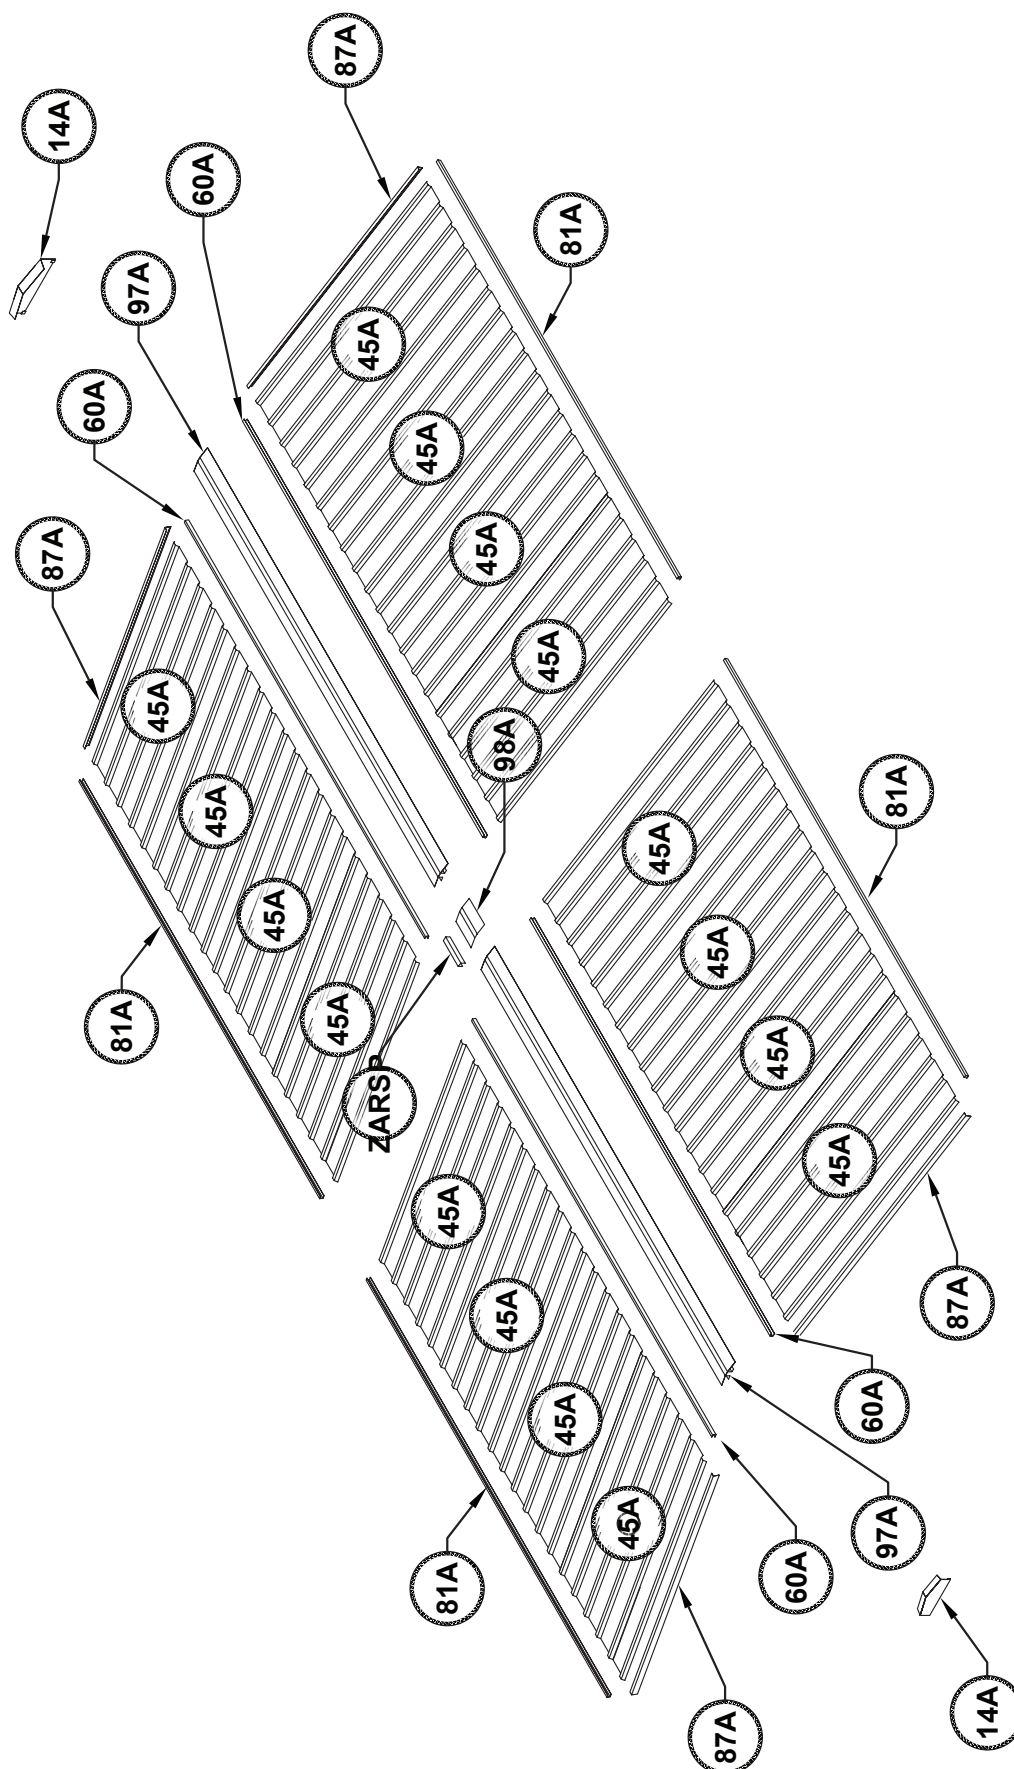


OVERVIEW OF WALL COMPONENTS

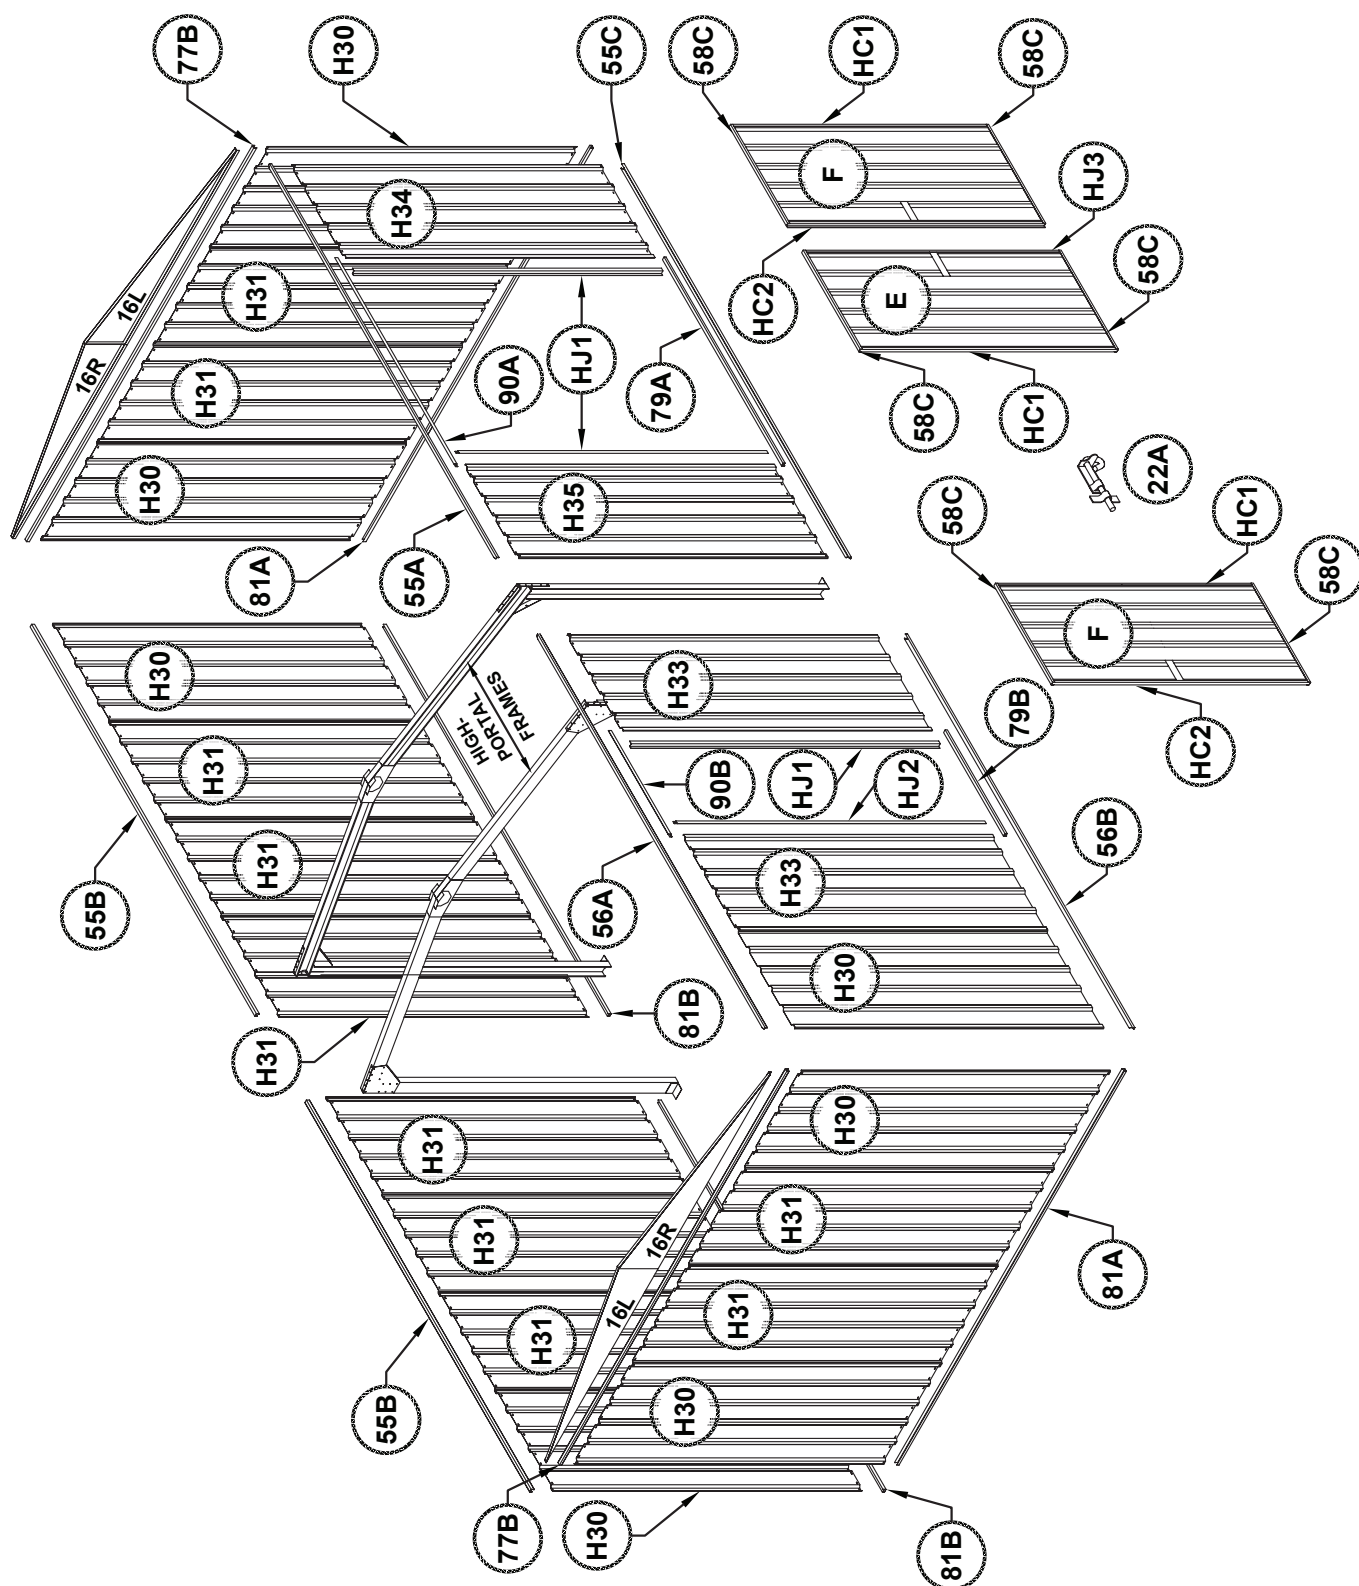


REAR PANEL ASSEMBLY

2 required.

One panel requires sheet H30 this end.


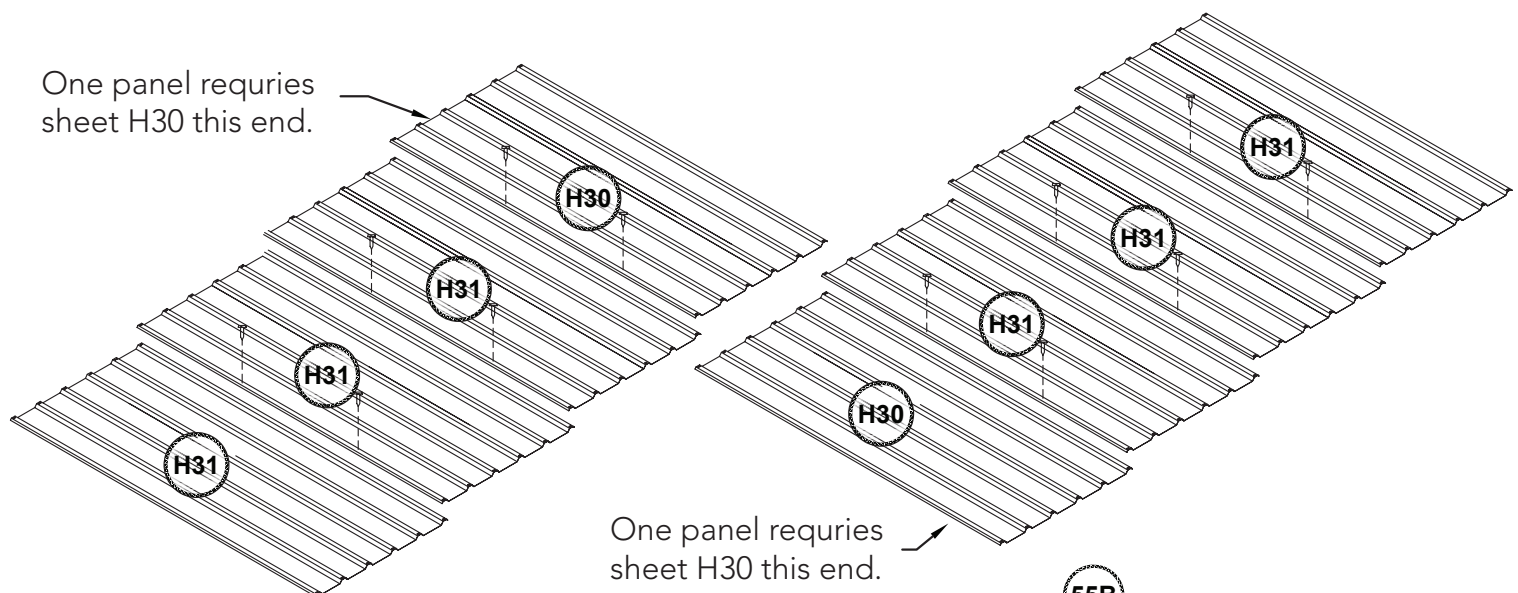


One panel requires sheet H30 this end.

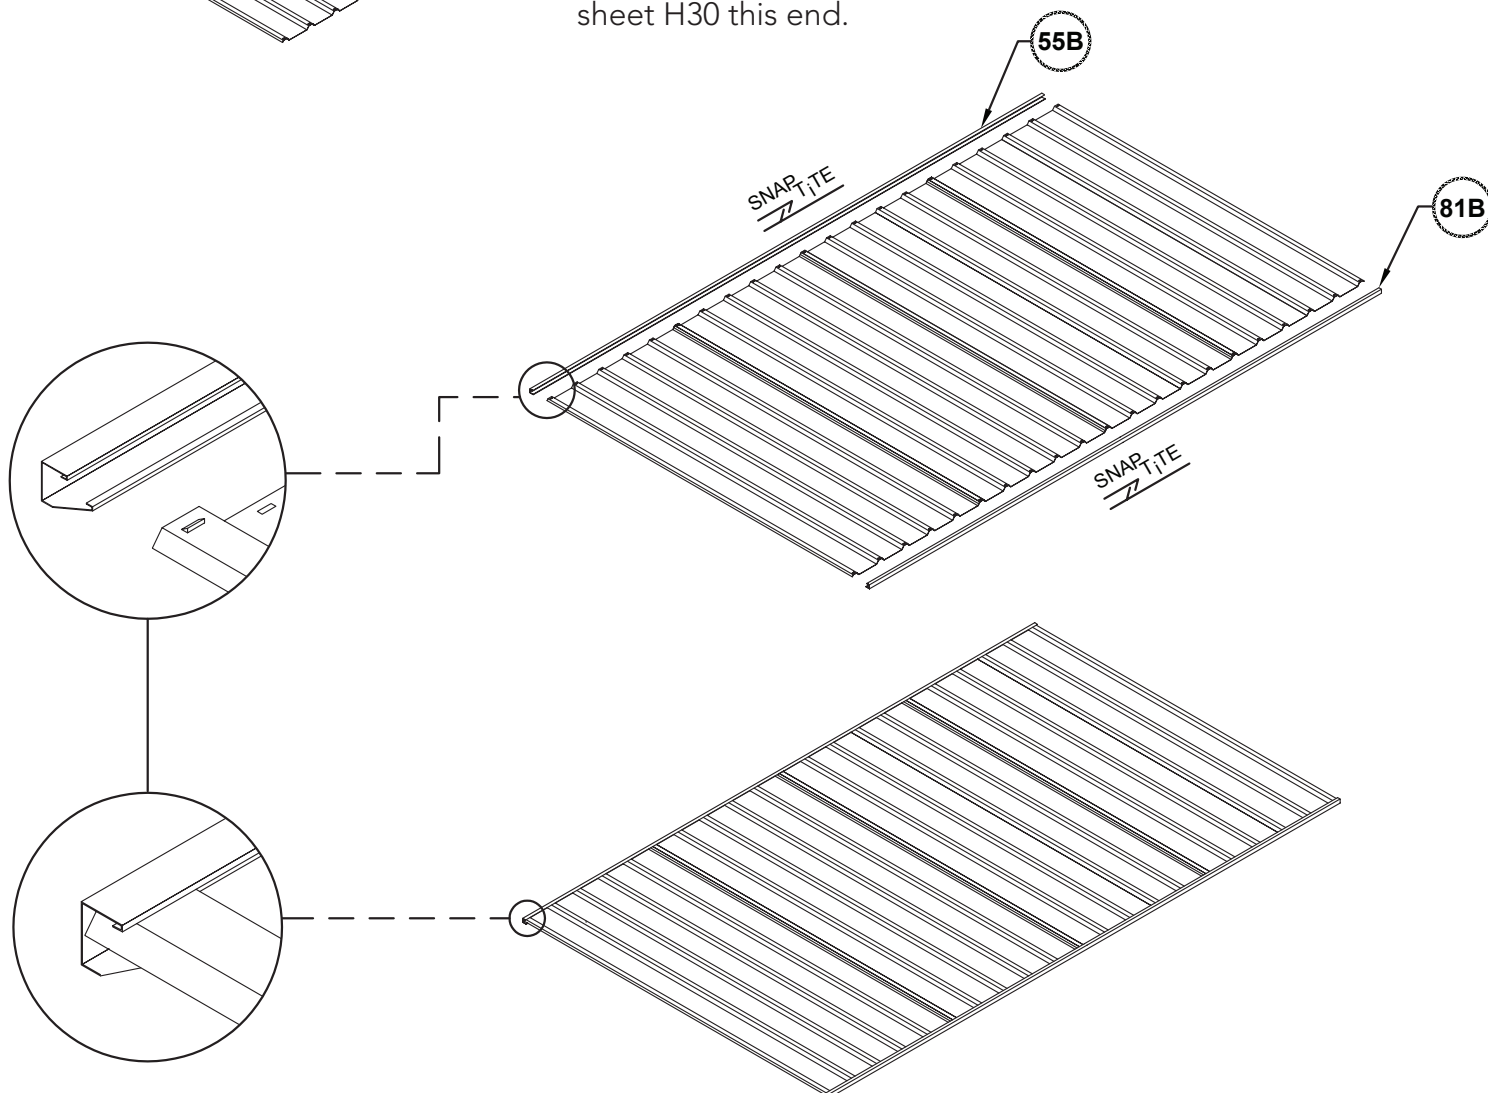

JOINING WALL AND ROOF PANELS

To make the total span we must now join sections of sheeting together for the roof and wall.

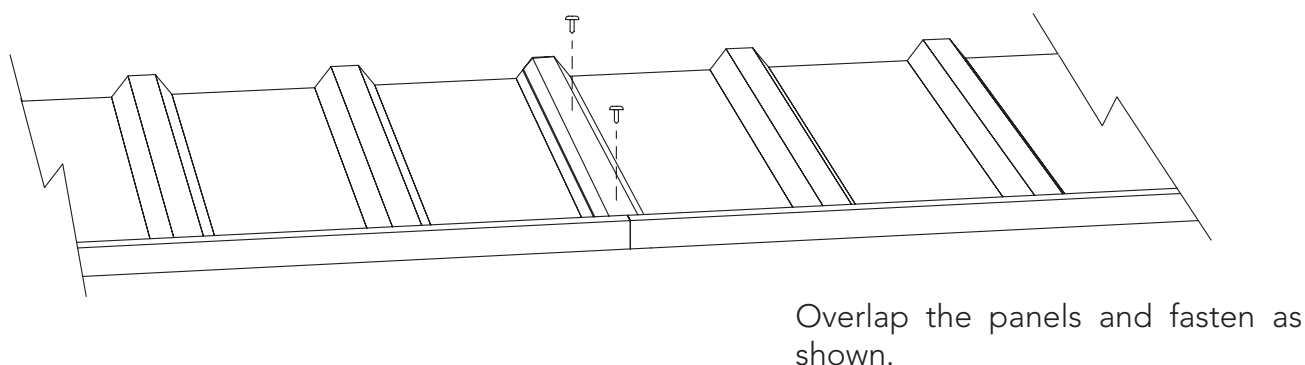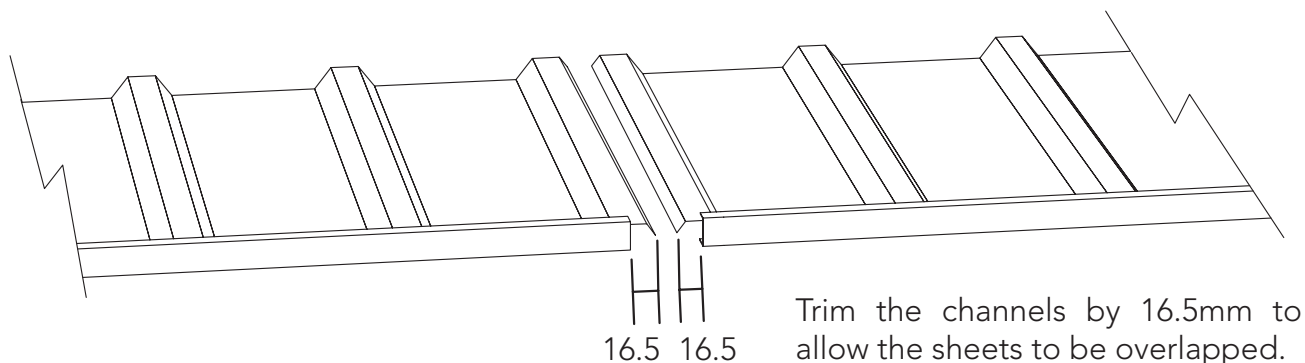

Refer to the panel construction section of this instruction set for further details and ensure that the assembled panels are not joined together with pre-punched holes incorrectly positioned.

The overall length of each panel is the same as the ridge beam.


Ridge beam and panel length	= 2993mm
Length to be cut off	= 16.5mm
New length	= 2976.5mm

Both panels joined = $2976.5 \times 2 = 5953\text{mm}$


It is not critical that the overall dimension is exact but try and make sure the length is within 5mm.

SIDE PANEL ASSEMBLY


2 required.

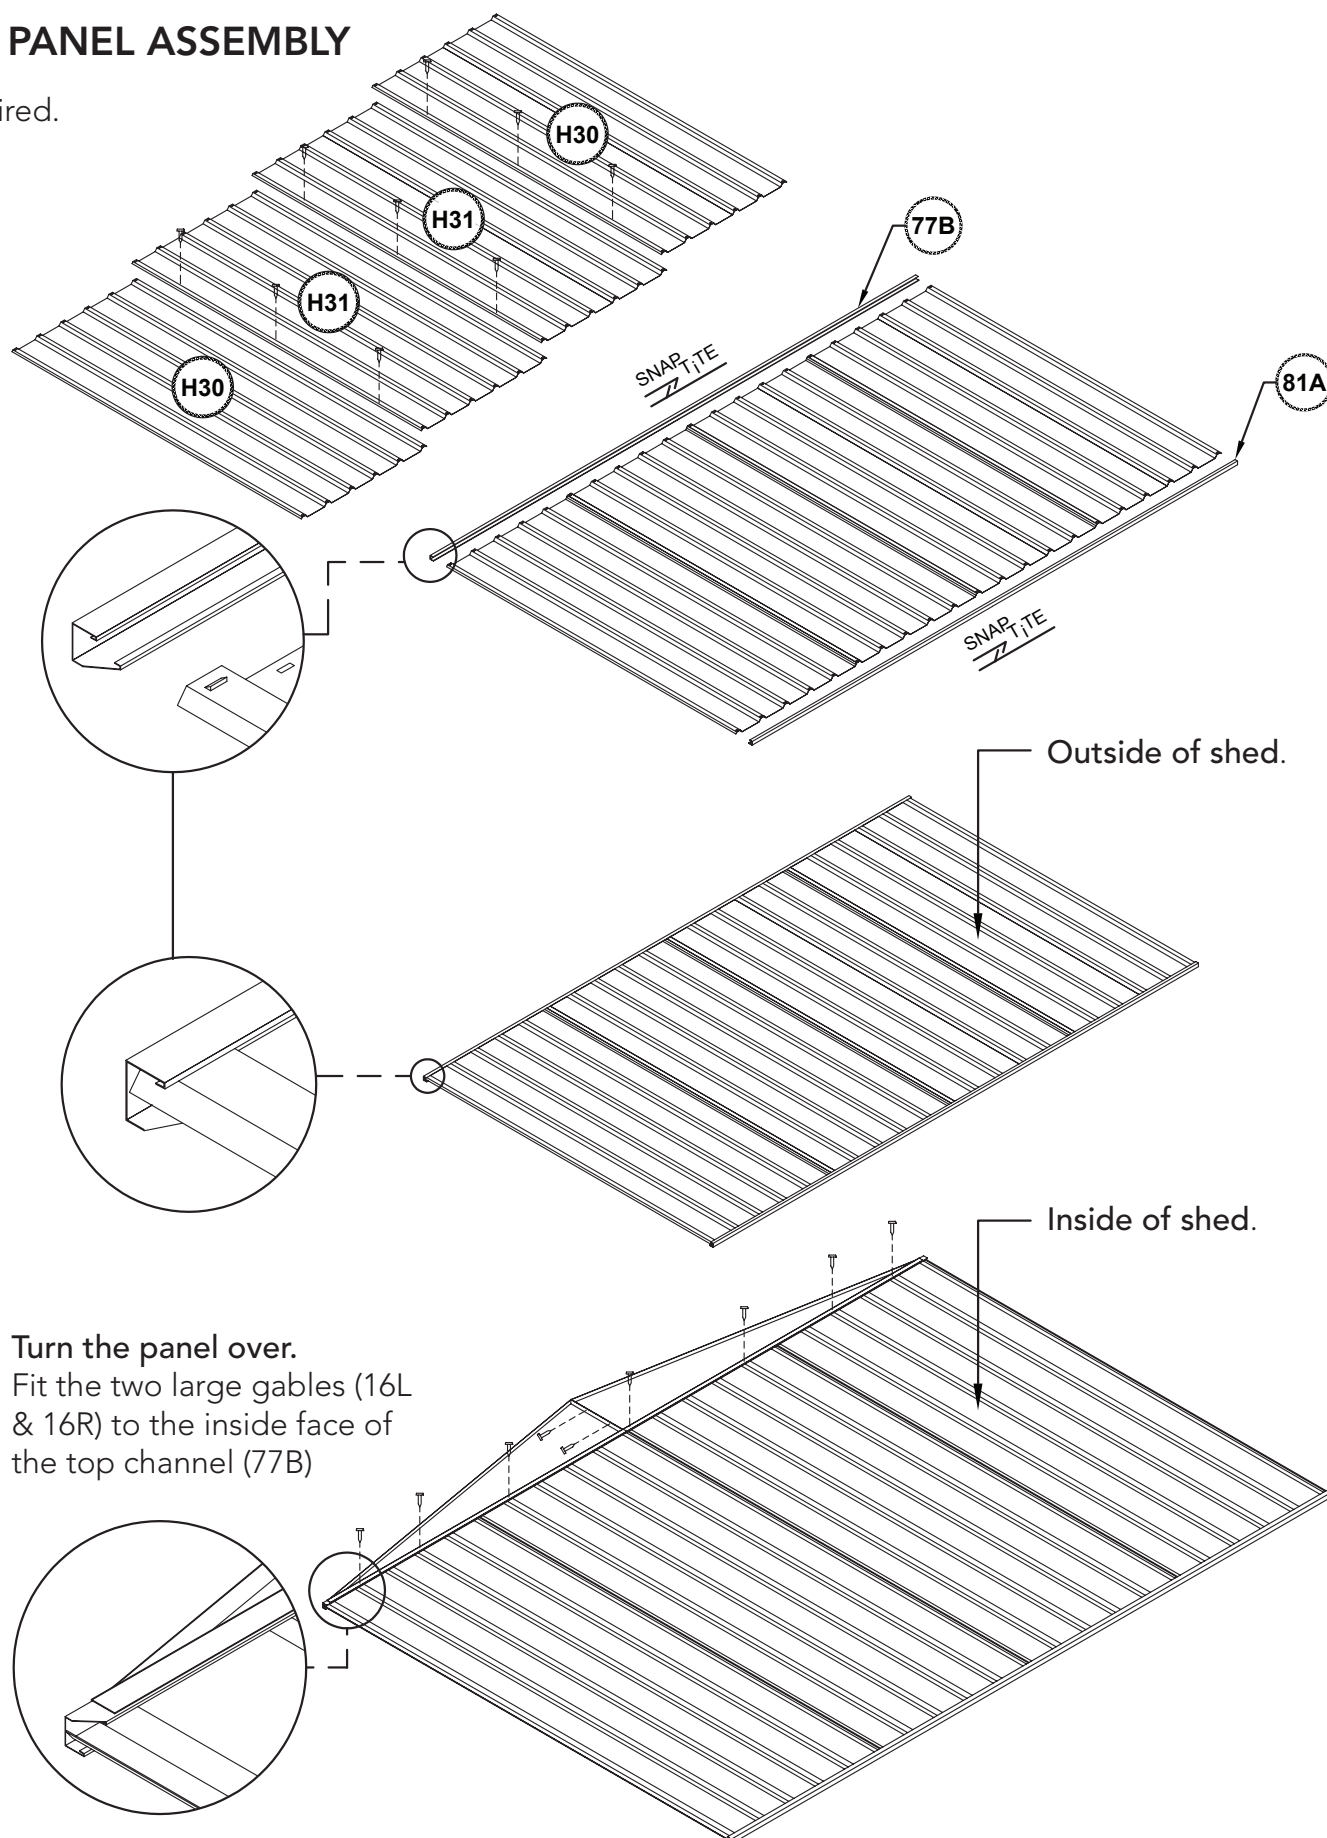

DOOR PANEL ASSEMBLY DOUBLE DOOR

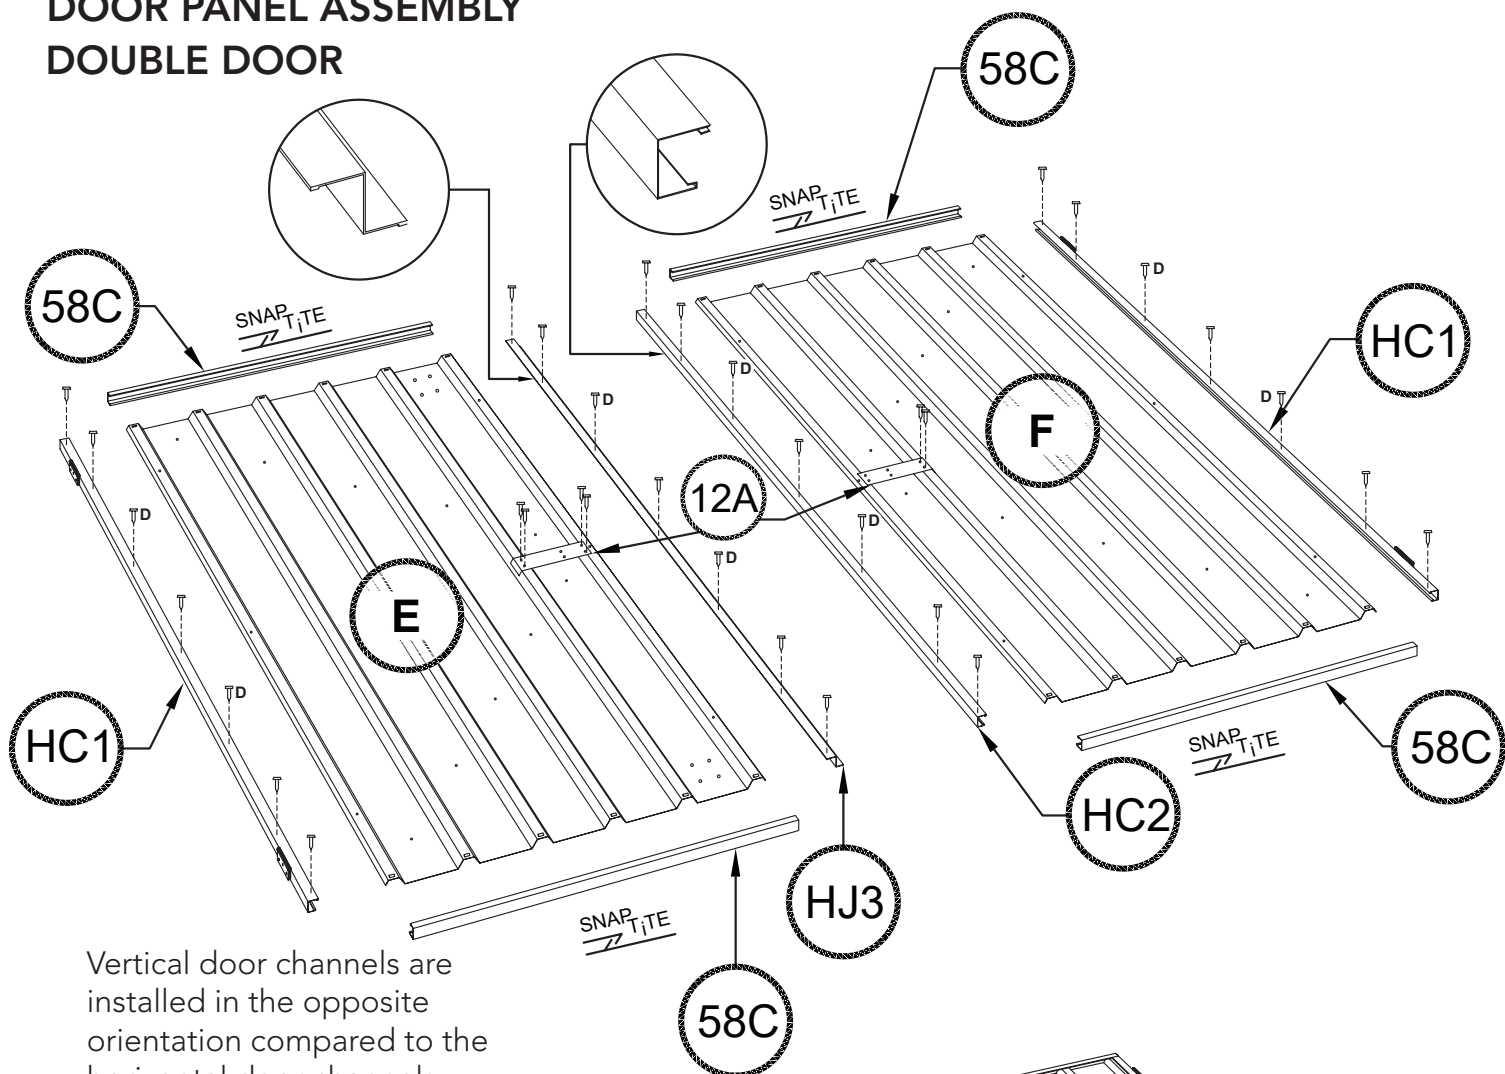

Vertical door channels are installed in the opposite orientation compared to the horizontal door channels.

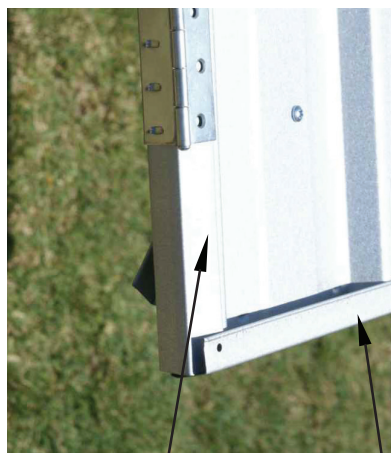

Long flange of channel

Short flange of channel


Four hole set to bolt on padbolt at top and bottom of door.

1 required.




DOOR PANEL ASSEMBLY

SINGLE DOOR PANEL

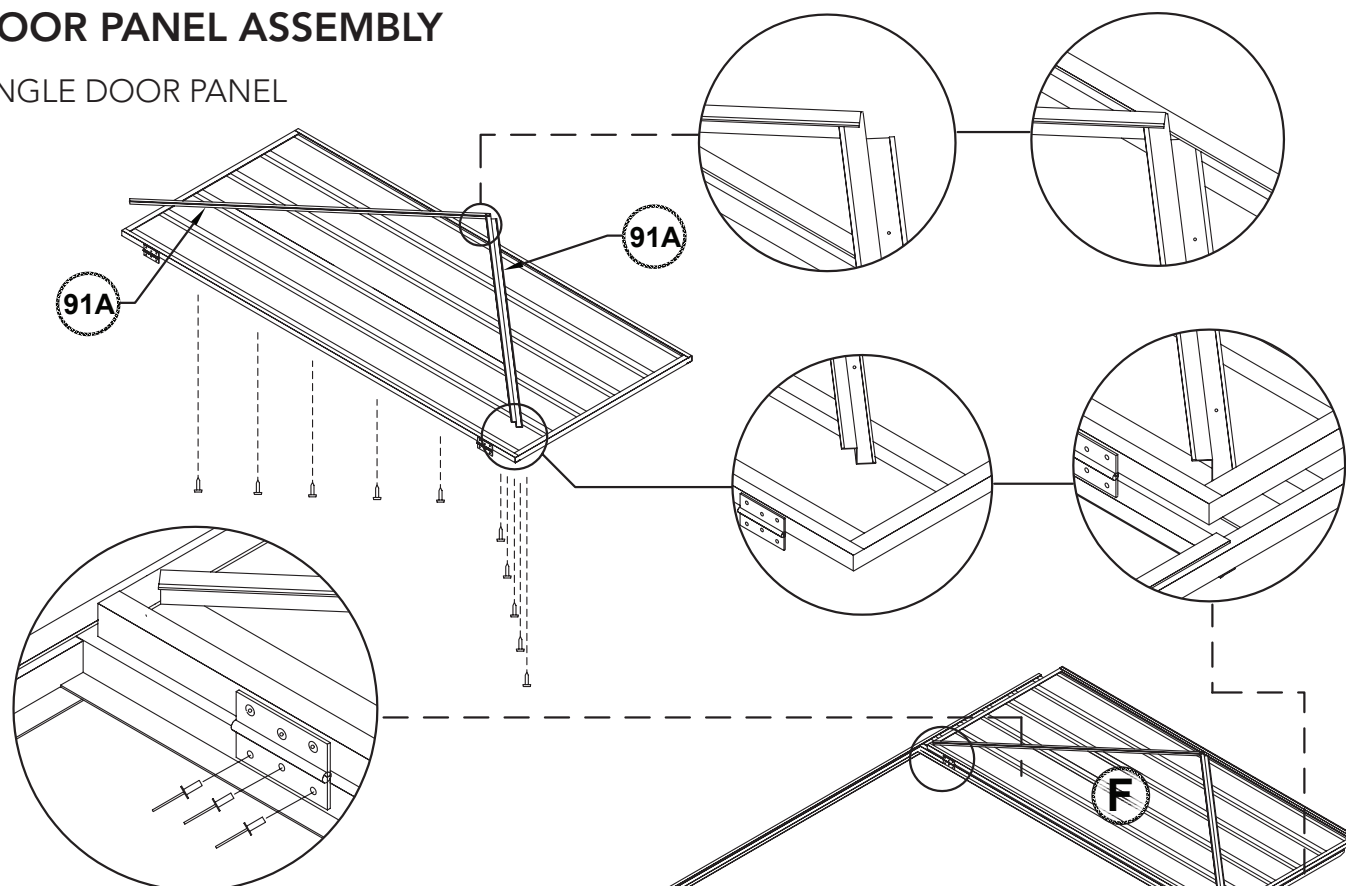


NOTE: Nuts and bolts are also supplied and may be used instead of rivets. Use a 4mm drill bit to enlarge these holes in the jamb

NOTE: The holes to fasten the padbolt hasp are not pre-punched to allow for proper alignment. Position the hasp centrally over the padbolt shaft and drill 3mm holes and secure with screws.

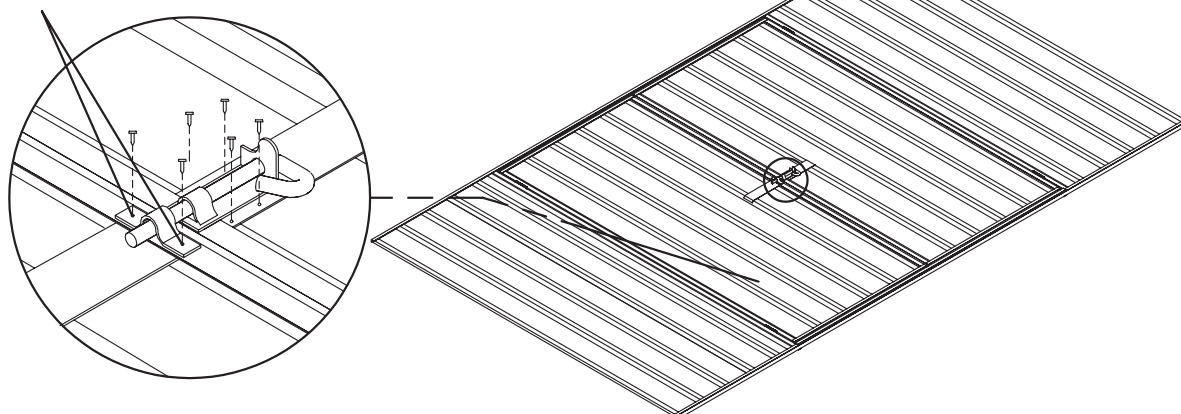

DOOR PANEL ASSEMBLY SINGLE DOOR


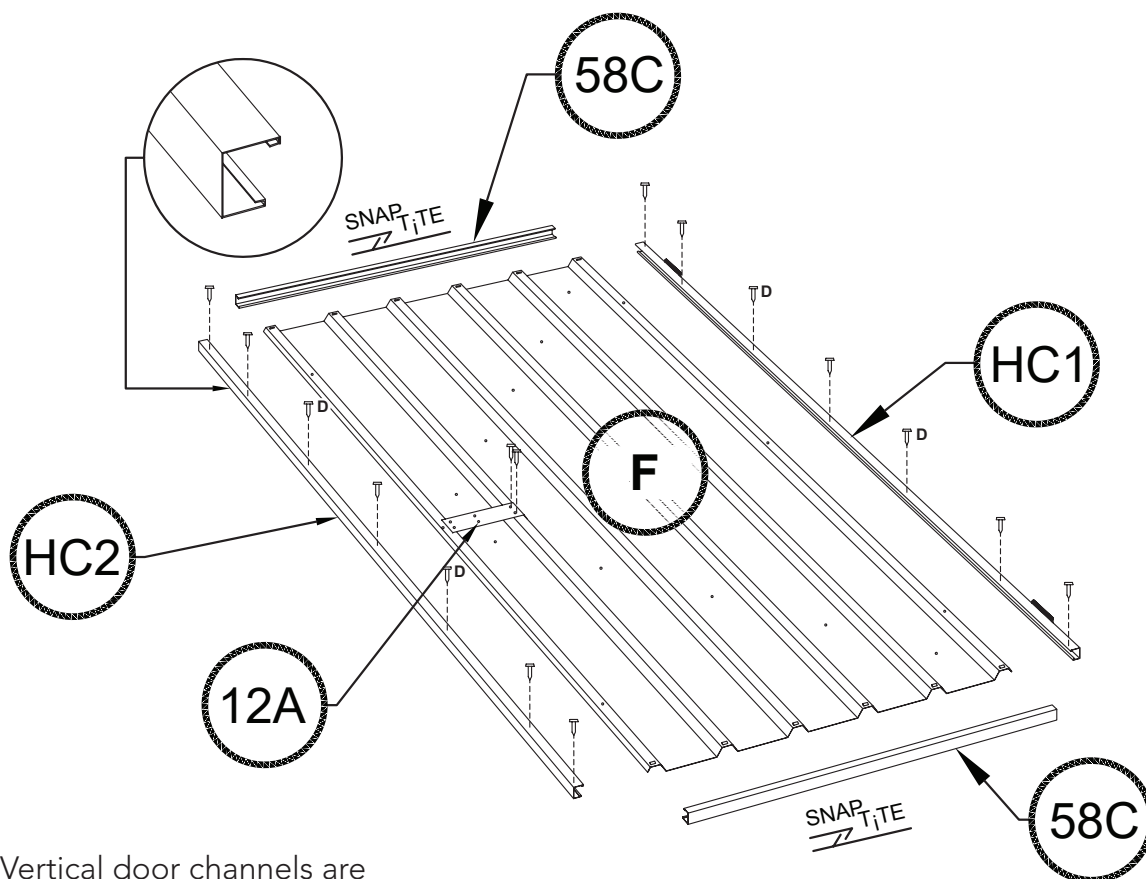


Vertical door channels are installed in the opposite orientation compared to the horizontal door channels.



Long flange of channel

Short flange of channel

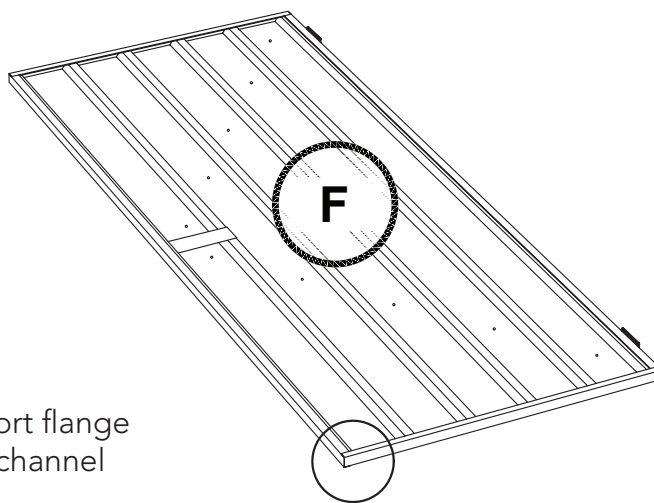


1 required.




DOOR PANEL ASSEMBLY

SINGLE DOOR PANEL

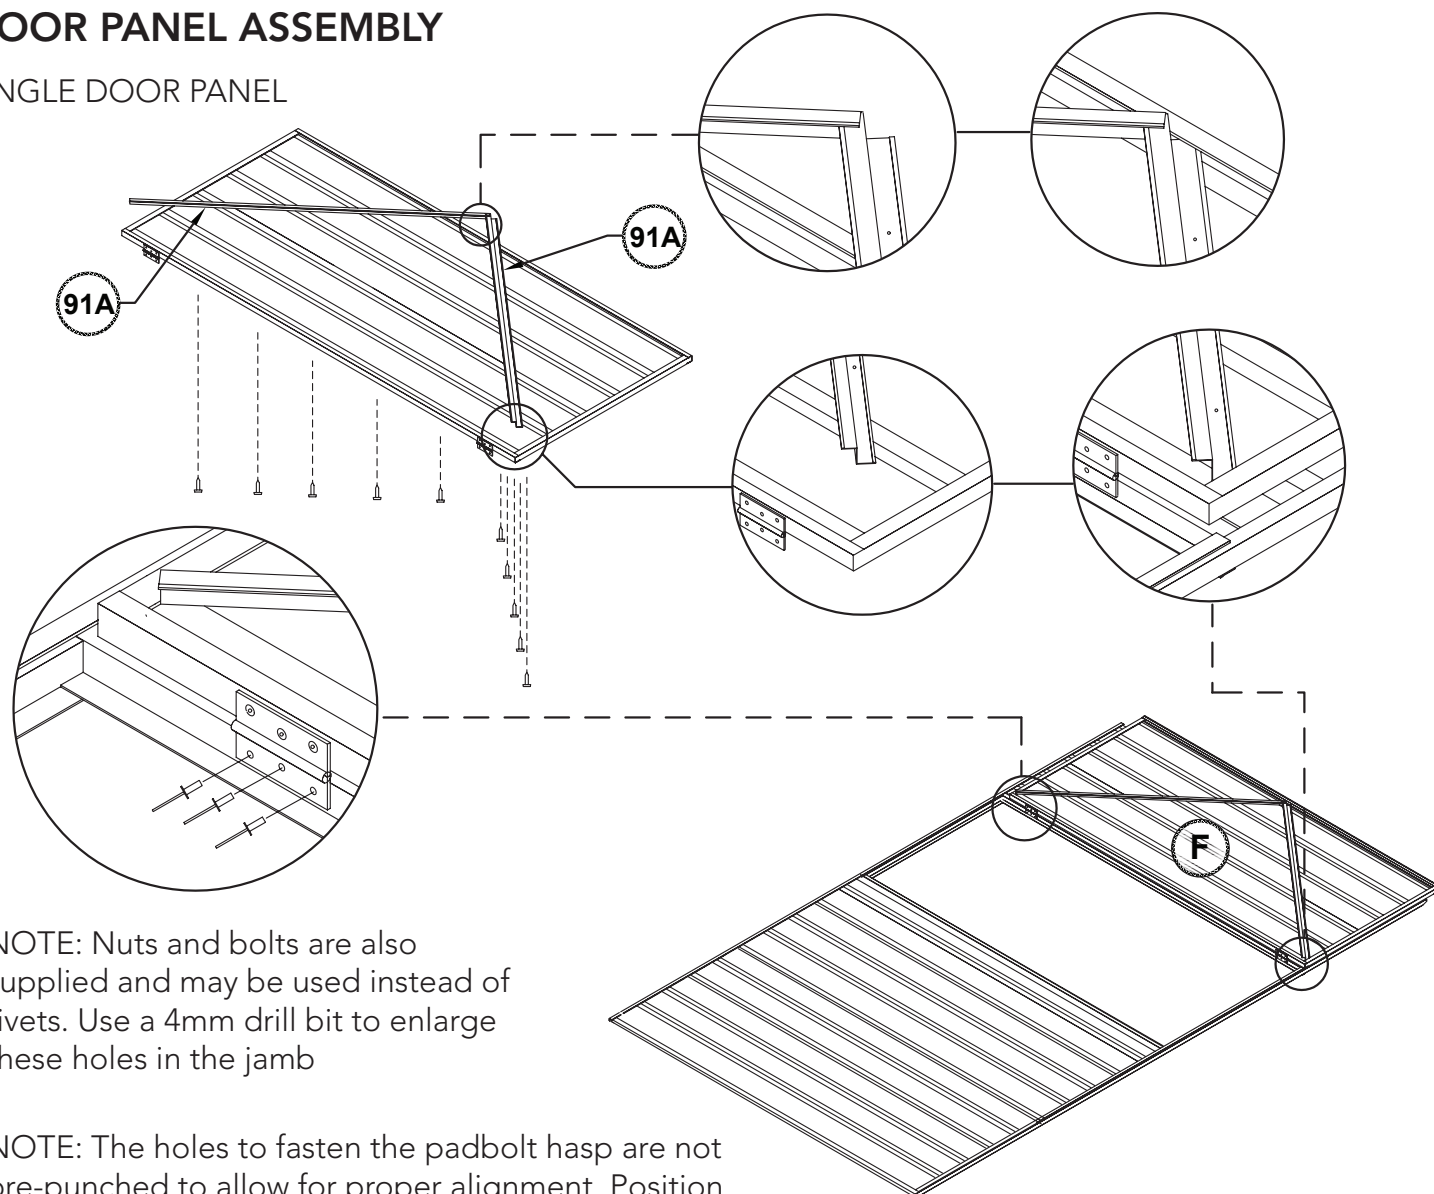


NOTE: Nuts and bolts are also supplied and may be used instead of rivets. Use a 4mm drill bit to enlarge these holes in the jamb

NOTE: The holes to fasten the padbolt hasp are not pre-punched to allow for proper alignment. Position the hasp centrally over the padbolt shaft and drill 3mm holes and secure with screws.

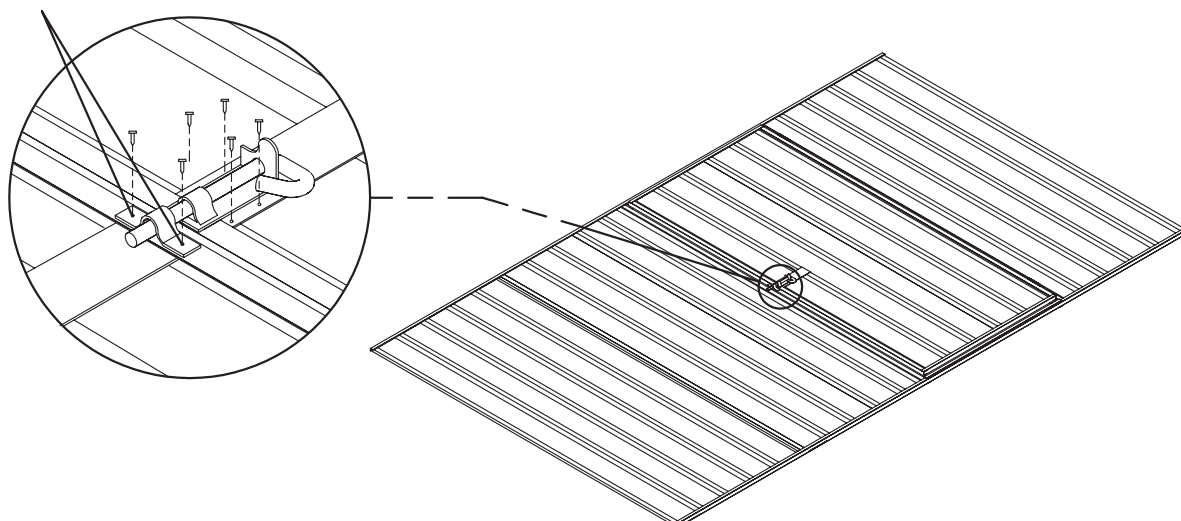


HIGH PORTAL FRAME DETAILS

2 required.

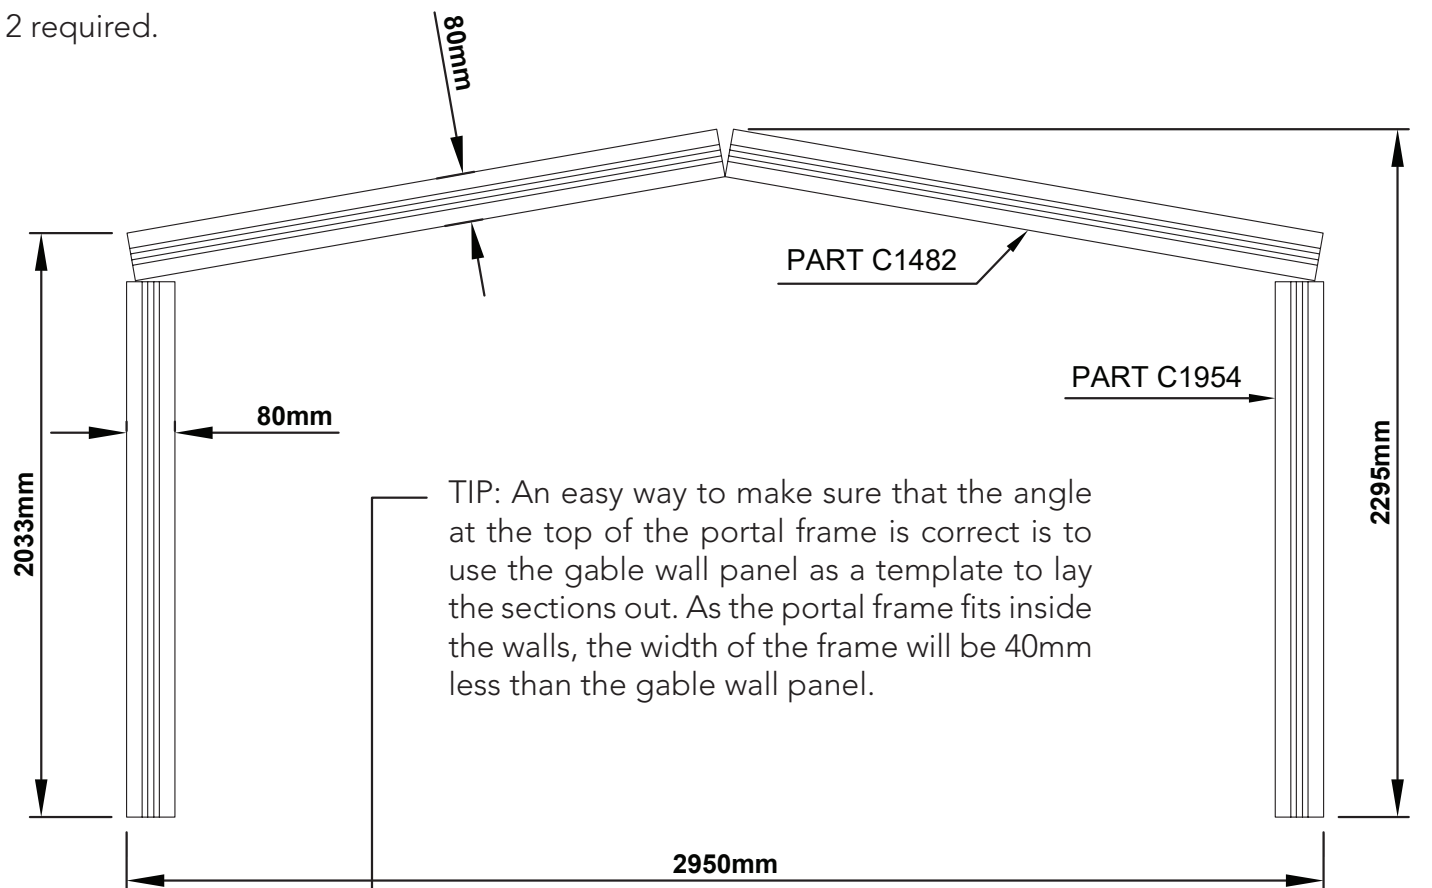


NOTE: Refer to the section **HIGH CENTRE PORTAL ASSEMBLY** for photos of the process.

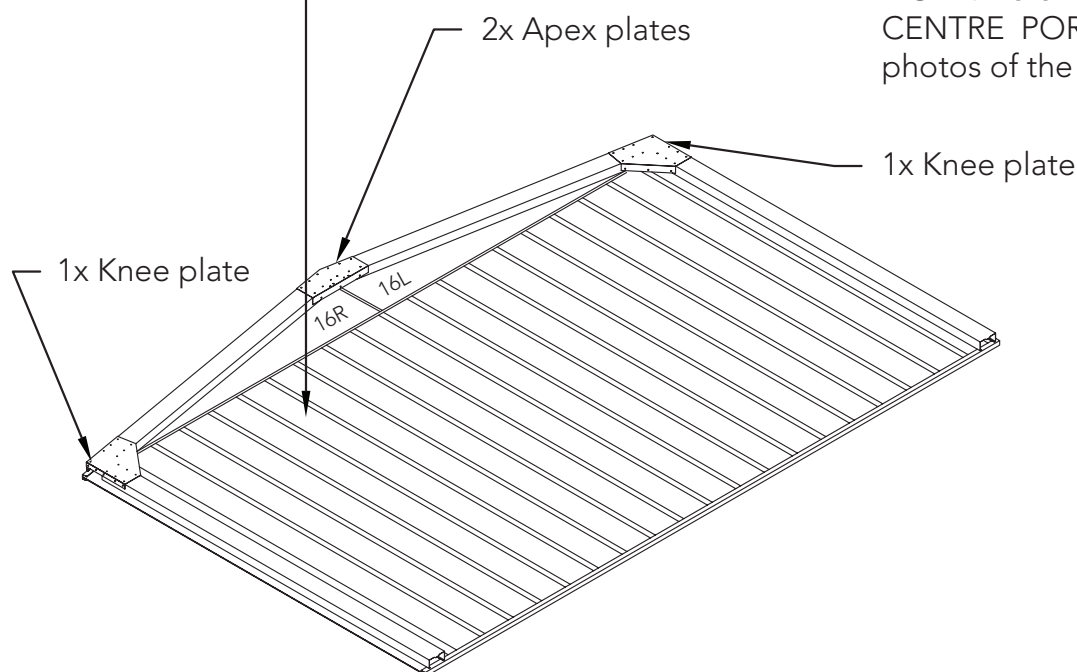

NOTE: If you have a slab with an edge rebate in your concrete slab, you will have to cut an amount off the bottom of the frame legs equal to the depth of the rebate.

HIGH PORTAL FRAME ASSEMBLY

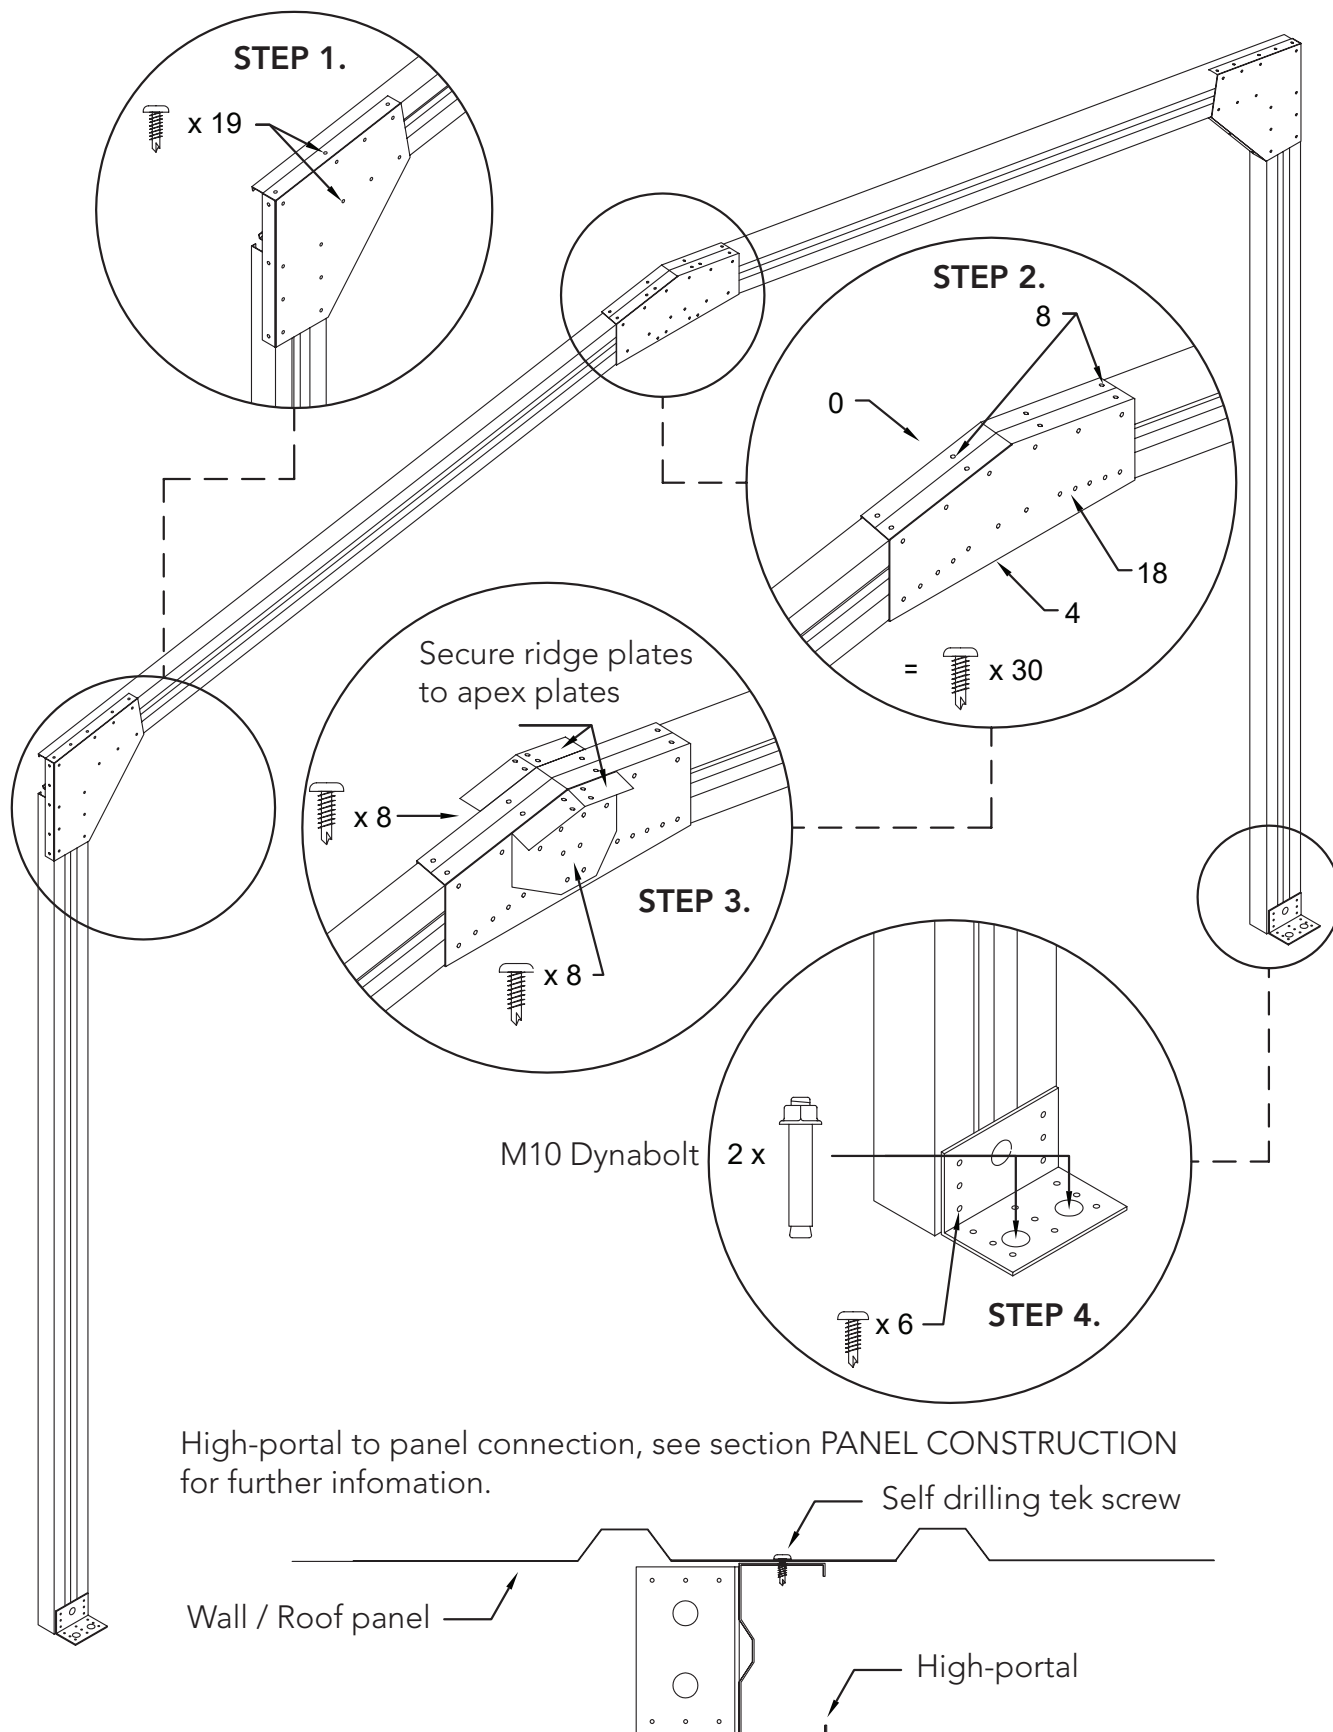


HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS


STEP 1.

Draw pattern on the concrete in accordance with the dimensions detailed in the assembly instructions.


Step 1a

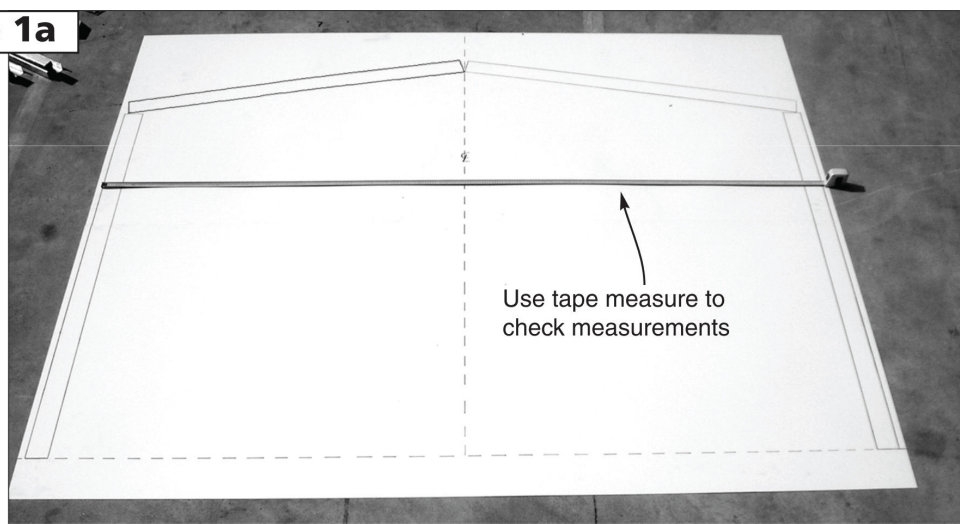

Step 1b

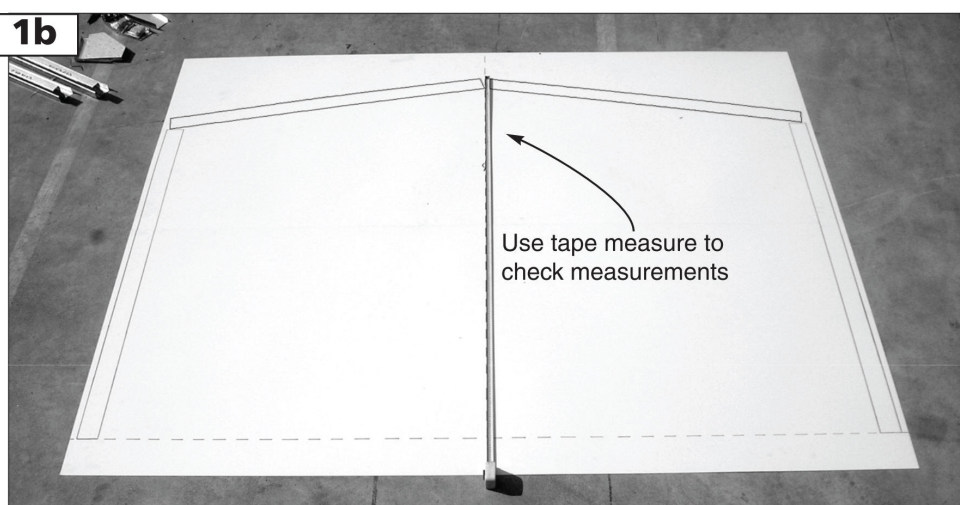

Step 1c

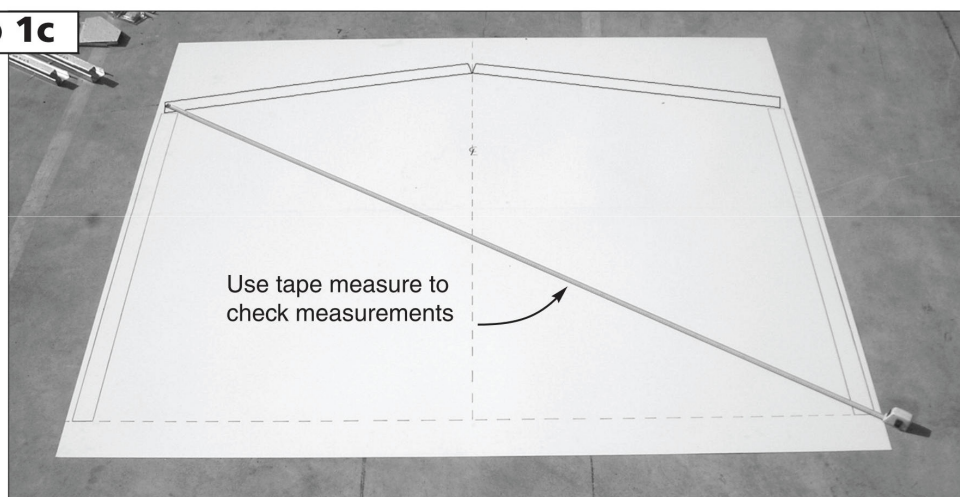


HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS


STEP 2.

Understand where components are to be positioned


Step 2a

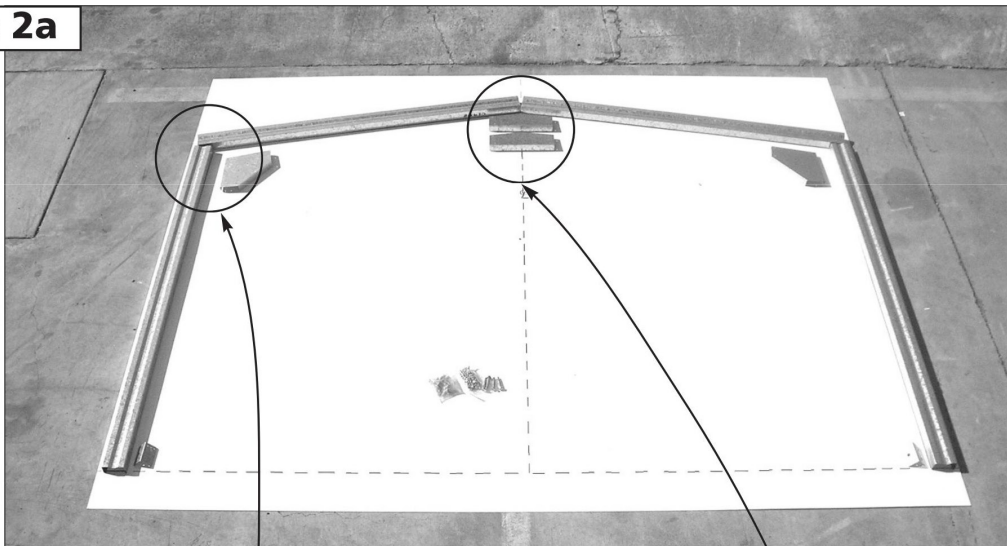

Step 2b

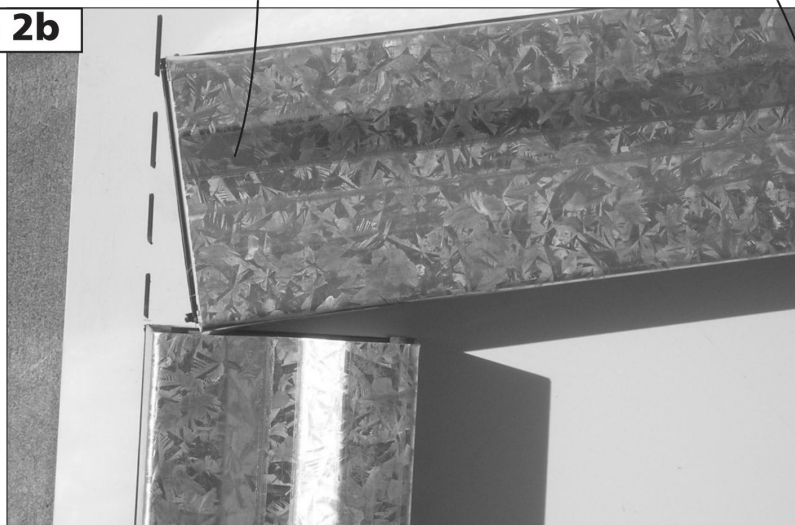

Step

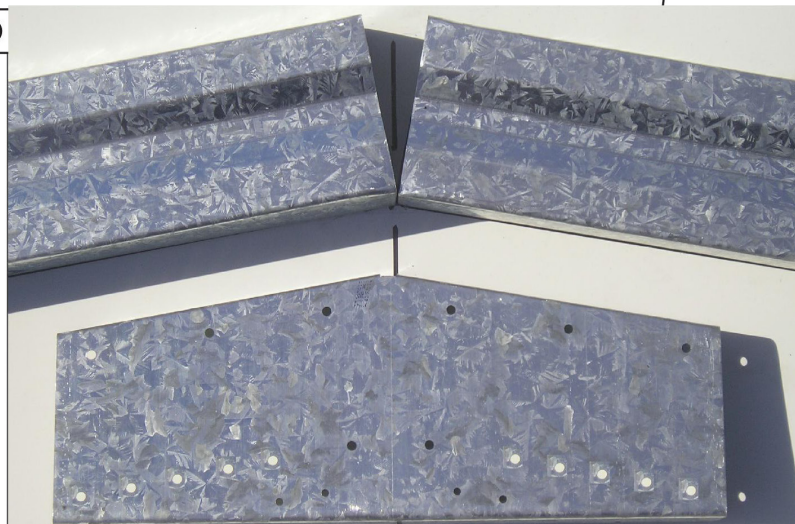

HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS


STEP 3.

Join C1482 to C1954


Step 3a



Step 3b

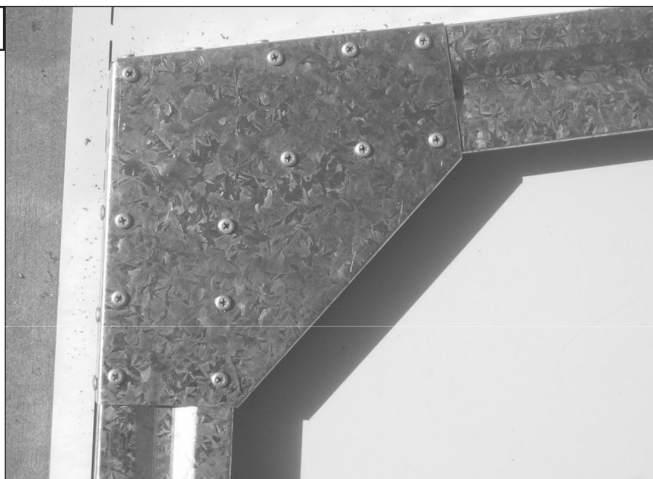

Step 3c

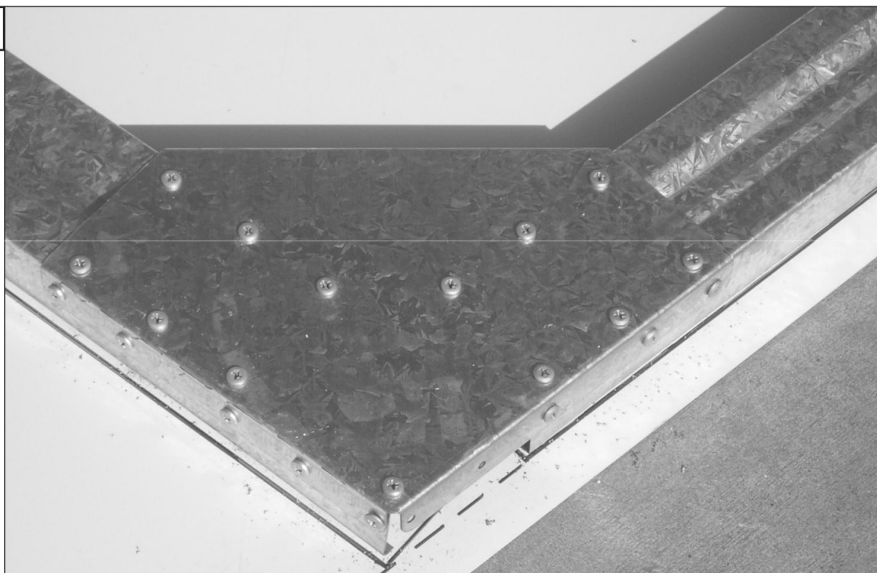


HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS

STEP 4.

Join C1482 to C1482


Step 4a

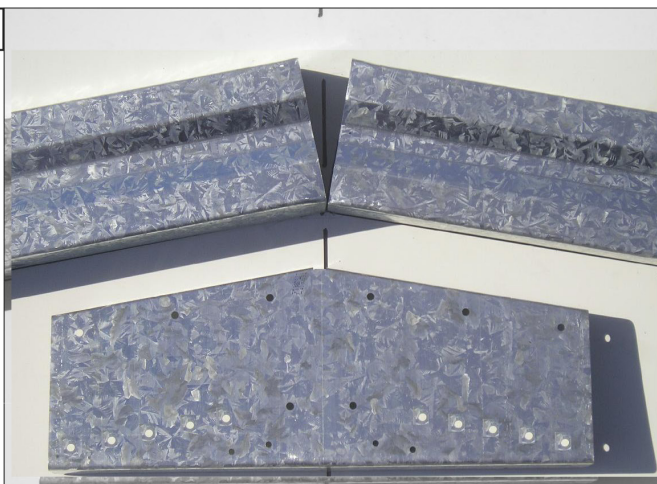

Step 4b



Step 4c

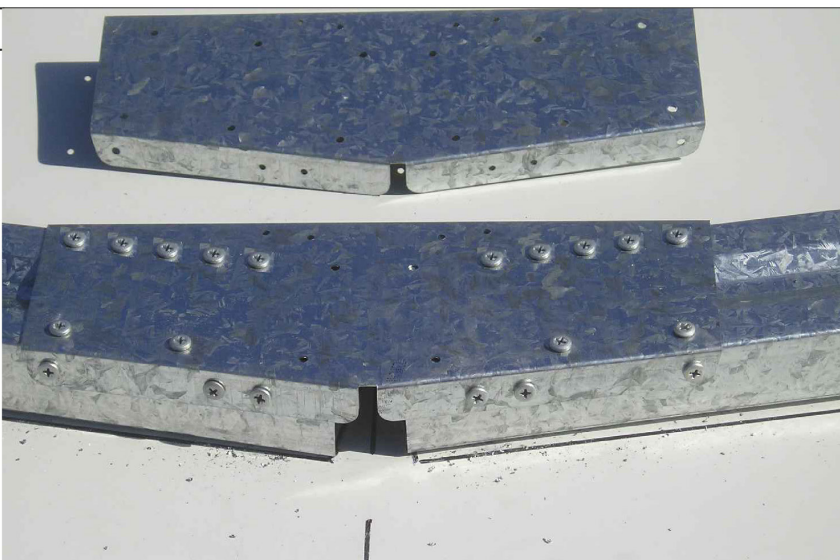

HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS

STEP 5.



Secure ridge plate (RBP)



HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS

STEP 6.




Secure multi purpose brackets

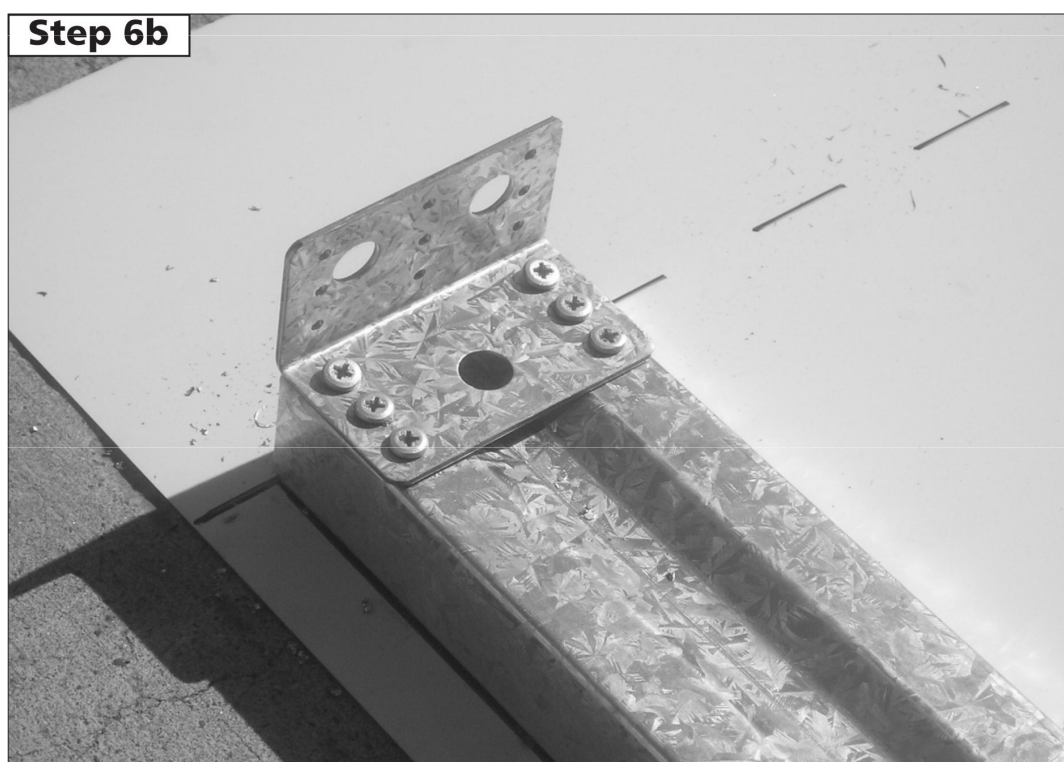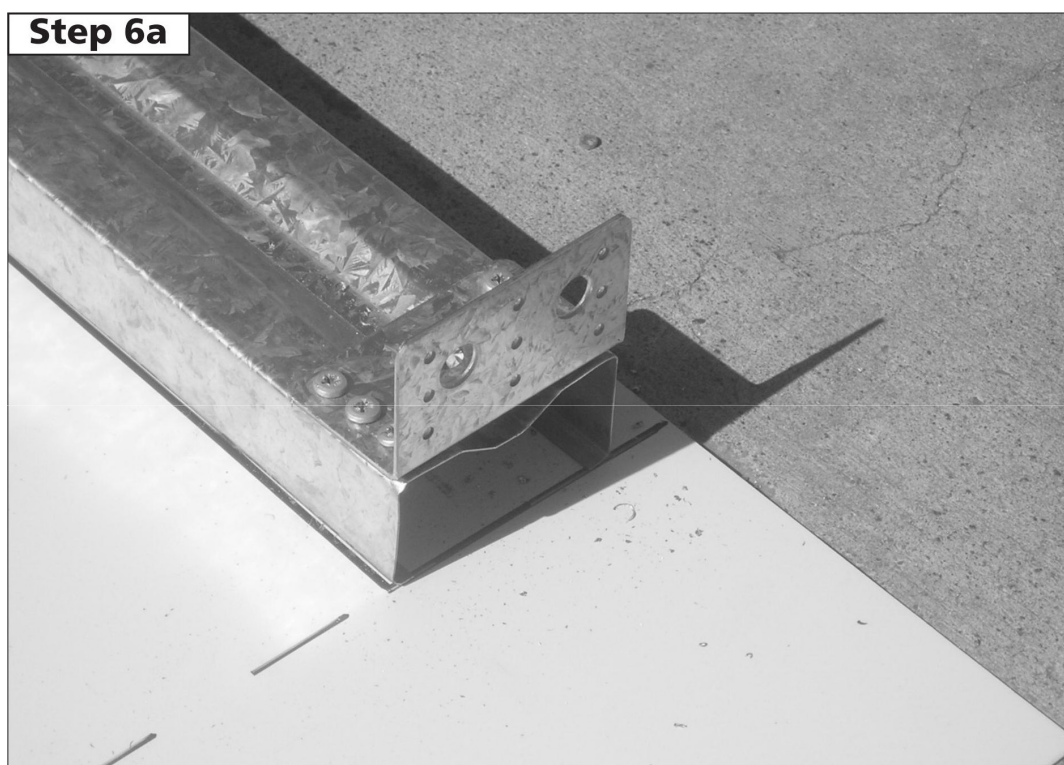

HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS

STEP 7.

Turn frame over and repeat steps 4 and 5.

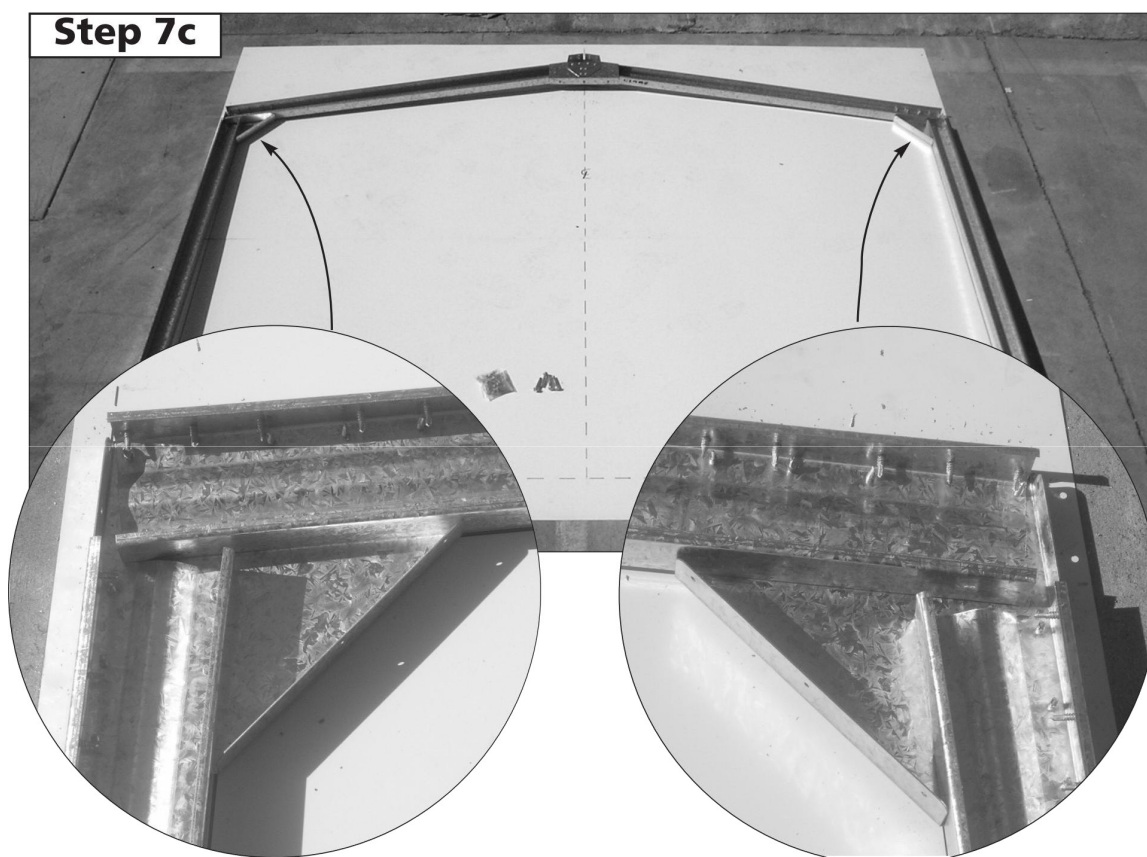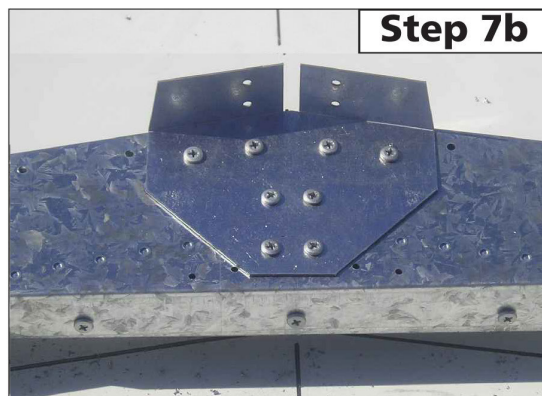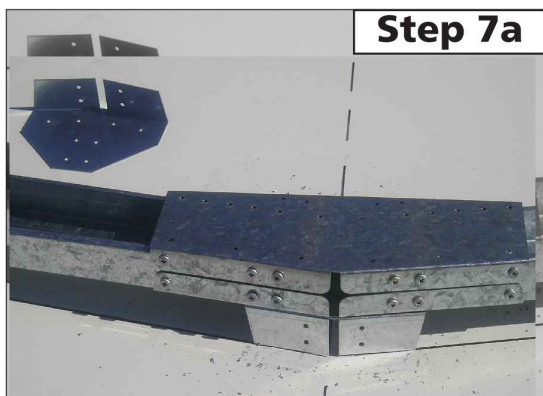



HIGH PORTAL FRAME DETAILS

Recommended slab dimensions - 6060mm x 3100mm

External wall dimensions - 5960mm x 3000mm

Internal wall dimensions - 5920mm x 2960mm


FIG 8A

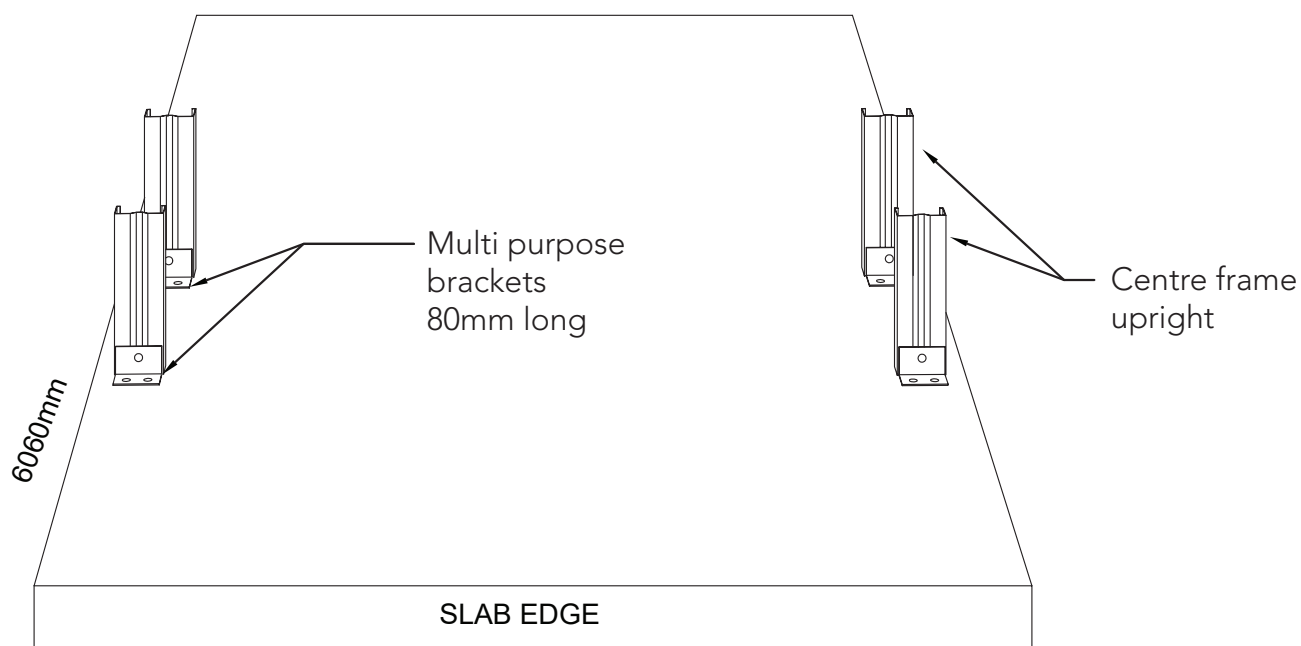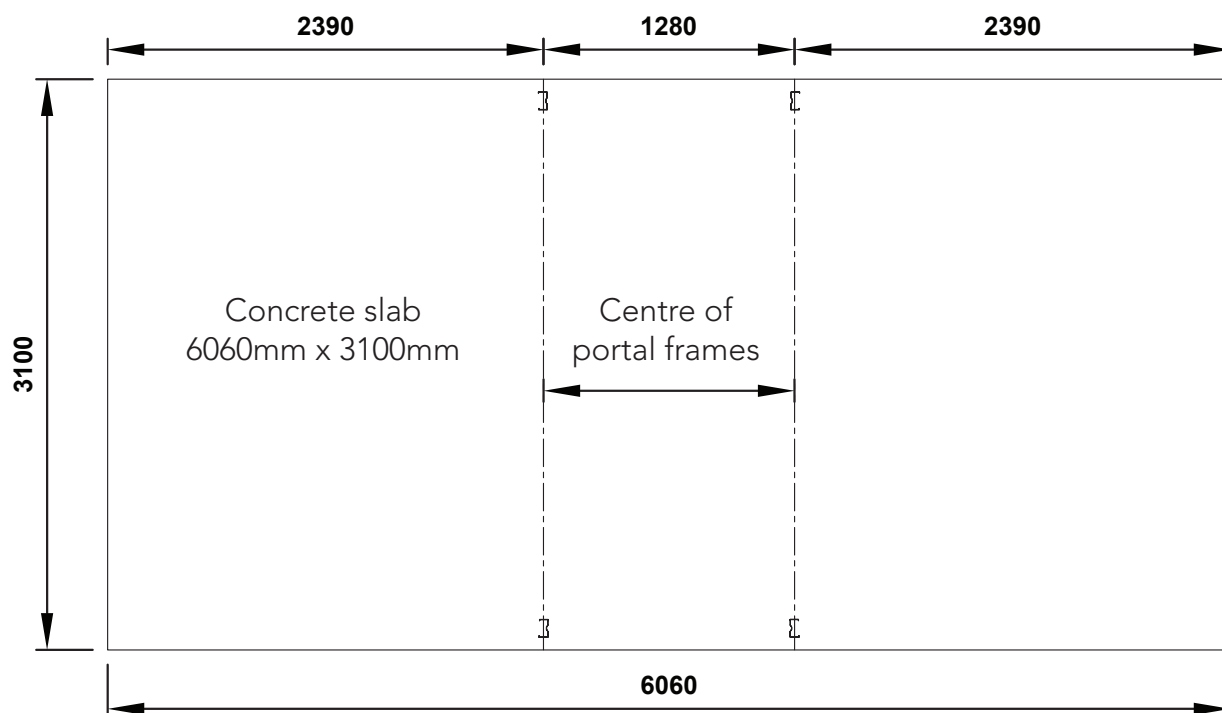

- Secure multipurpose brackets to uprights using self drilling screws
- Move frames into position, mark and drill holes in slab using 10mm masonry drill bit
- Secure frames to slab with M10 dynabolts.

PANEL CONSTRUCTION


NOTE: Take care to ensure that all wall panels are not upside down. The top channels of each panel are pre-punched for attaching roof sheeting. The base channels are not.

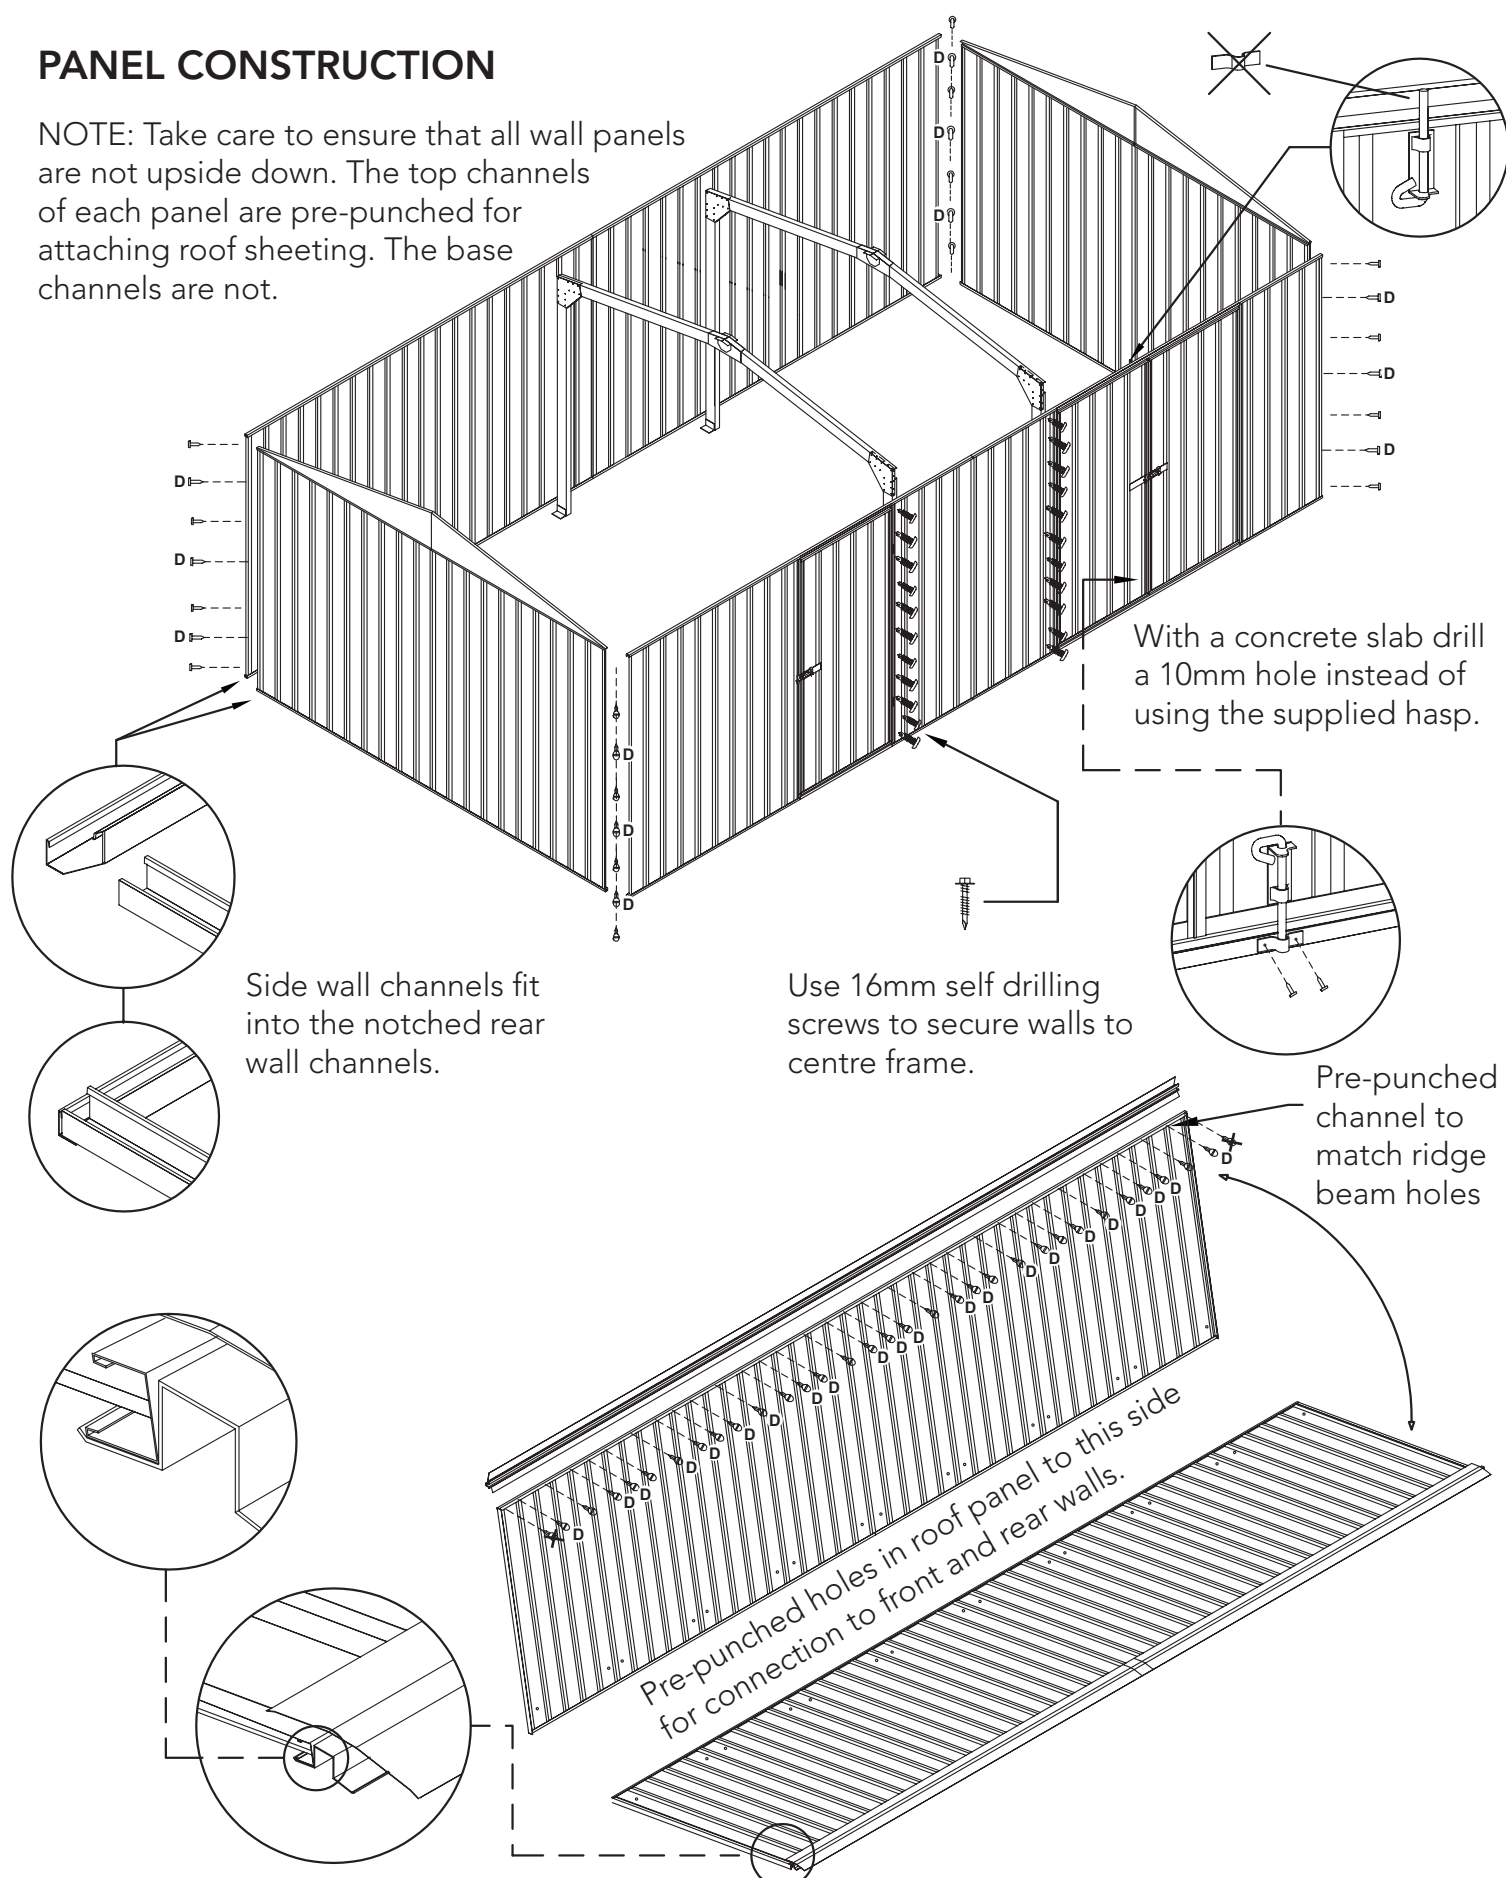


ROOF CONSTRUCTION

STEP 1.

Slide the roof panels into position and secure with only one screw in each corner at this stage.

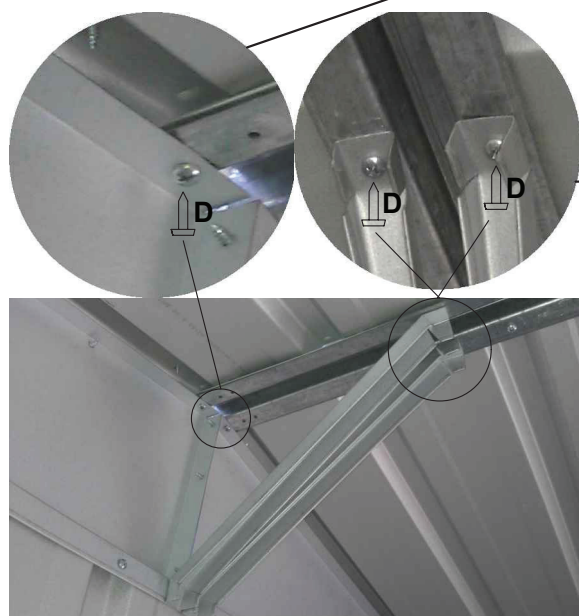


INSIDE VIEW

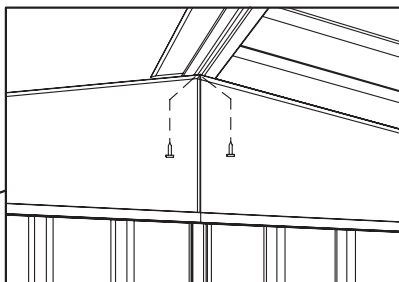

STEP 2.

Secure ridge beam to gable sections with two screws at either end.

INSIDE VIEW

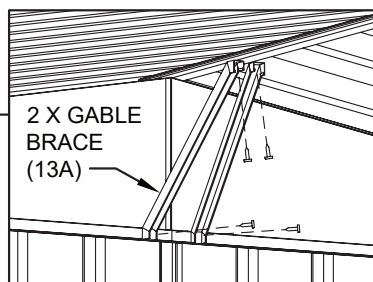


STEP 3.

After the roof panels have been secured, fit two gable braces (13A) form the top wall channel to the underside of the ridge beam at 45 degrees as shown to both gable walls

NOTE: This symbol  denotes that holes to be pre-drilled with a 3mm drill bit before fastening.


- WARNING -

Do not climb on or walk on the roof.

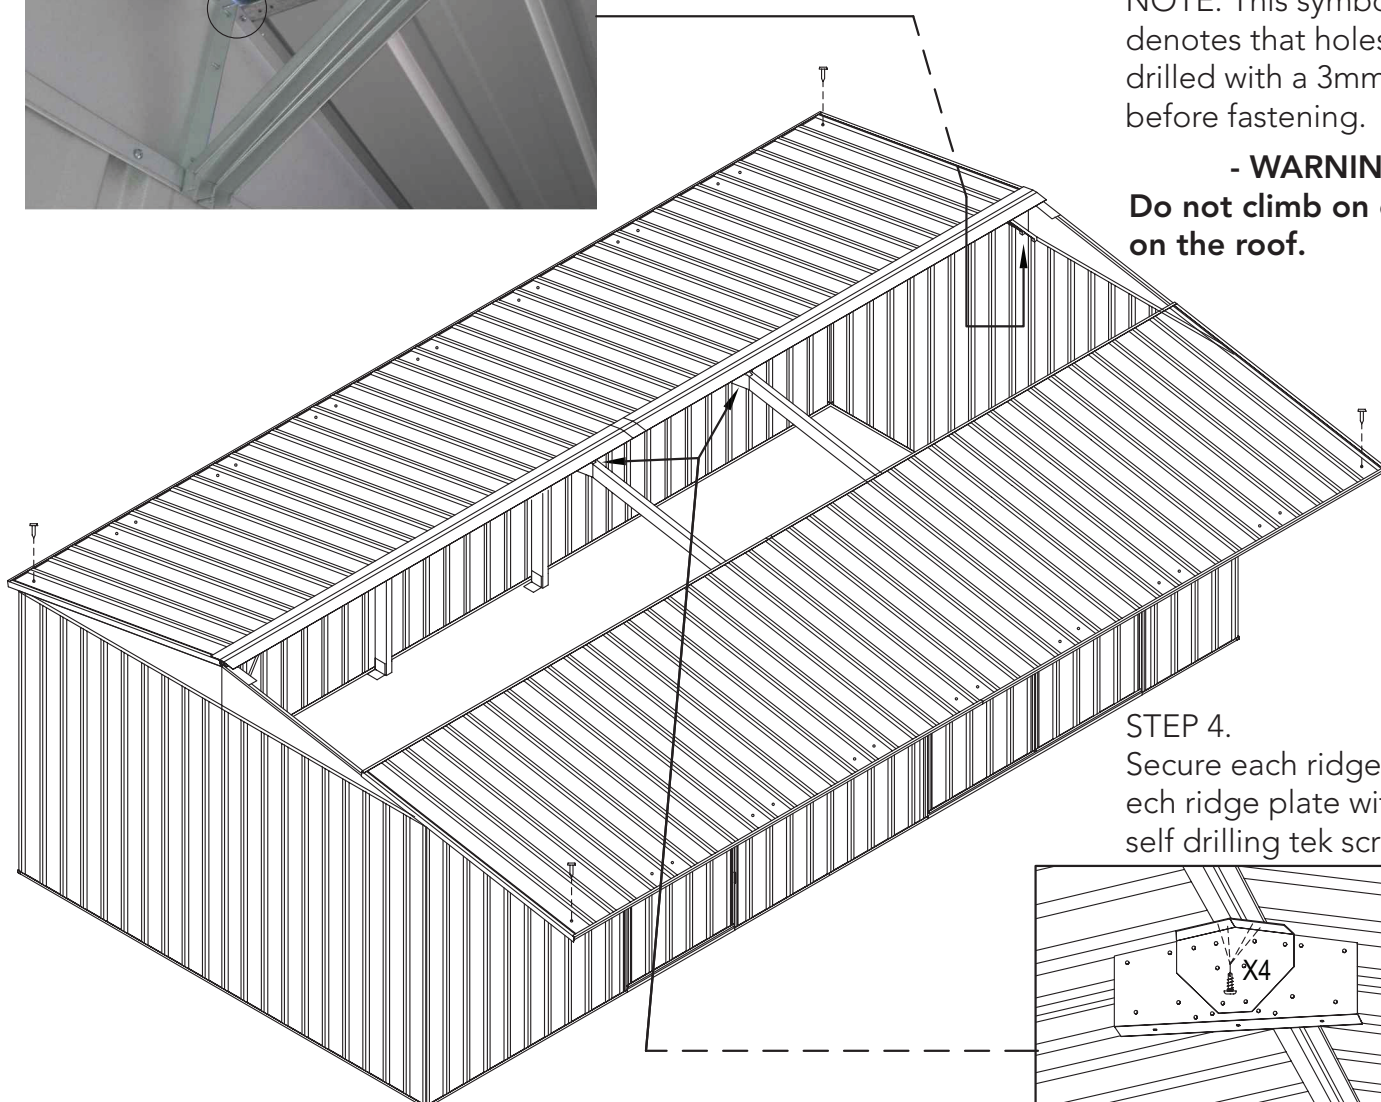

STEP 4.

Secure each ridge beam to each ridge plate with 4x 16mm self drilling tek screws.

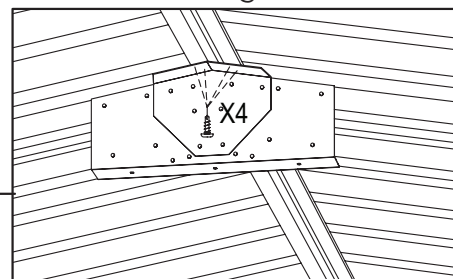

FINAL CONSTRUCTION

ANCHORING OF SHED

STEP 1.

Secure the roof panels to the wall panels as shown.

STEP 2.



Secure the roof panels to the internal frames with self drilling tek screws.

STEP 3.

Secure the portal frames to the ridge beam as detailed on the previous page.

STEP 4.

Bend the top and bottom flanges as shown, then hook the bottom flanges under the top channel and screw top to the ridge beam with two screws.

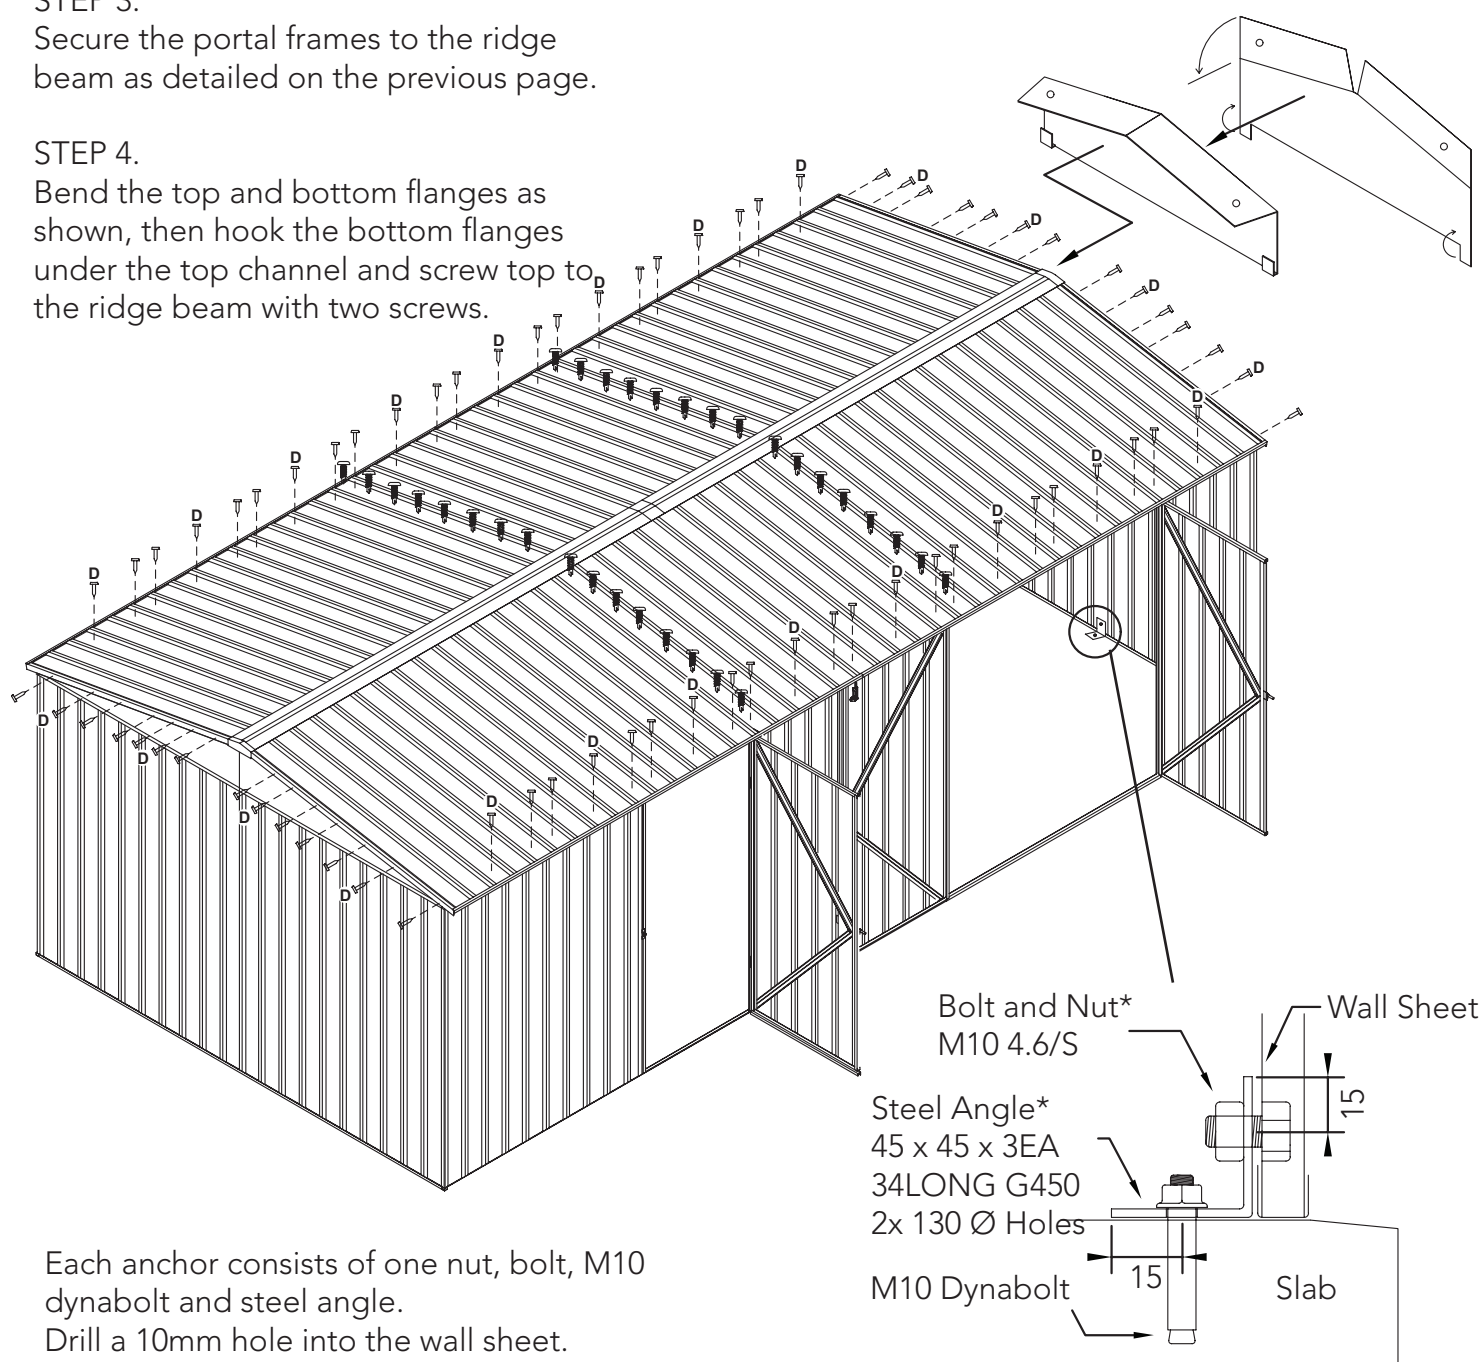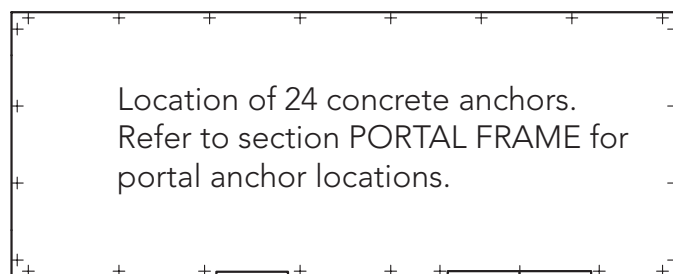

Each anchor consists of one nut, bolt, M10 dynabolt and steel angle.
Drill a 10mm hole into the wall sheet.
Drill a 10mm hole into the concrete.

* Denotes hot dip galvanised finish

Absco Large Gable Roof Shed Notes

General

- 1.G This instruction manual shall be read in conjunction with other consultants drawings, specifications and written instructions provided by Absco and/or their representatives.
- 2.G The drawings provided herein are for installation and structural engineering purposes only. If discrepancies are discovered within the documentation provided, these shall be brought to the attention of Absco and written approvals obtained prior to commencing the affected section of work.
- 3.G If in doubt ask.
- 4.G Until approvals from the local authorities are obtained, commencement of construction from these drawings shall not commence.
- 5.G Unless varied by the project specification, all materials and workmanship shall be undertaken in accordance with the relevant Australian standards and the by-laws and ordinances of the relevant building authorities.
- 6.G All dimensions indicated in these drawings shall be verified on site by the installation contractor. Scaling of drawings shall not be undertaken.
- 7.G Prior to commencing works on site, the contractor shall verify the position of all services in the area to ensure that the construction does not interfere with any of those services.
- 8.G During installation on site the shed structures shall be maintained in a stable condition with no part becoming overstressed or permanently deformed.
- 9.G In circumstances where the shed has been installed in a manner which is inconsistent with the installation manual, structural certification shall be void.
- 10.G The structural components detailed within this installation manual have been designed for the following loads in accordance with AS/NZS1170 based on a Class 10a, Type 2 structure:
- Roof Live Load: 0.25 kPa uniformly distributed or 1.1 kN concentrated as per AS/NZS1170.1

Wind Load: Classification N2, Non-Cyclonic to AS4055 where $V_u = 40$ m/s, $V_s = 26$ m/s

Windward wall $C_{p,e} = 0.7$

Leeward Wall $C_{p,e} = -0.3$ to -0.5 as applicable based on shed geometry

Side Wall $C_{p,e} = -0.2$ to -0.65 as applicable based on shed geometry

Roof $C_{p,e} = -0.3$ to -1.04 depending on wind direction

Absco Large Gable Roof Shed Notes


Steelwork

- 1.S All structural steelwork shall have a corrosion protection system applied consistent with AS/NZS 2312-2002.
- 2.S All structural steelwork detailed within this installation manual shall be minimum Grade 550 for roll formed sections (including roof and wall sheeting and portal frame members) and Grade 250 for angle sections.
- 3.S All multi purpose and anchor brackets for connection onto the supporting reinforced concrete slab (includes 45x45x3EA x 34mm long and 47x47x1.9EA x 80 long) shall be minimum Grade 450.
- 4.S All portal frame knee and apex plates shall be minimum Grade 450
- 5.S All roof, and wall sheeting shall be minimum base metal thickness of 0.3mm
- 6.S All portal frame members shall be minimum base metal thickness of 0.75mm.
- 7.S All snaptite channels and jambs shall be minimum base metal thickness of 0.42mm
- 8.S All top hats shall be minimum base metal thickness of 1.0mm
- 9.S All portal frame knee and apex plates shall be minimum base metal thickness 1.0mm
- 10.S All screw fasteners shall be Phil Pan Head Zinc Plated #8 x 3/4" (STP0820)
- 11.S All bolt fasteners for anchoring shall be M10 minimum grade 4.6/S
- 12.S Installation of screw fasteners shall generally be undertaken in accordance with the relevant provisions of AS1562.

Absco Large Gable Roof Shed Notes

Supporting Slab and Foundations

- 1.F The supporting slab foundation for the garden shed shall be of a minimum size indicated on the installation manual. The top surface of the formed slab shall be level and free of any irregularities which would inhibit the installation of the shed.
- 2.F The structural engineering design for the supporting slab foundation shall be undertaken by a suitably qualified structural engineer. The design shall consider all relevant provisions of AS3600 and AS2870.
- 3.F Between adjacent footings or excavations, the contractor installing the slab foundation shall not exceed a rise of 1 in a run of 2 in line of slope.
- 4.F Unless approved in writing by the slab foundation engineer, the limits of excavations near existing footings shall be in accordance with that indicated below.

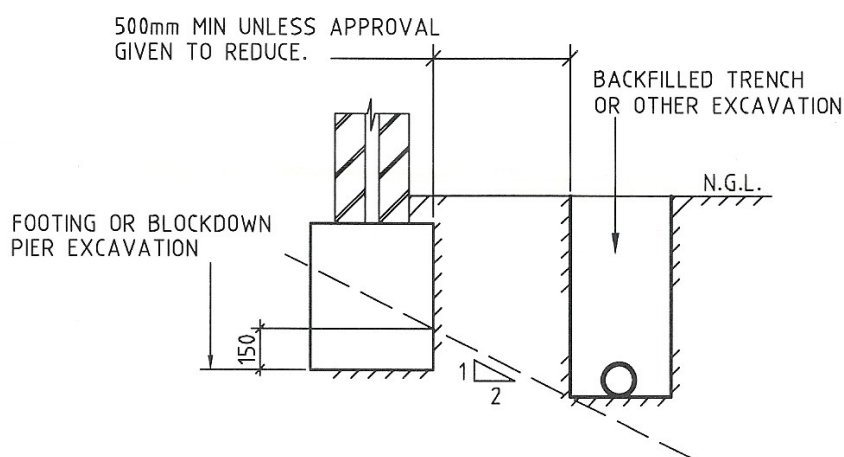

The contractor shall undertake investigatory localised excavations near existing footings to ascertain their depth prior to excavating adjacent to them. It is noted that excavating to a depth below that indicated above shall not be undertaken without the written approval from the engineer.

Absco Sheds Storage Guidelines

- Absco Sheds are designed to be weatherproof for normal weather conditions. In the event of extreme weather conditions such as heavy rain, combined with high wind gusts, the ridge capping, sheeting joints, screw fixings etc., may exhibit minor deformations which may allow some water entry. These areas should be checked regularly to ensure that maximum strength and protection is maintained.
- Other weather conditions such as extreme heat and extreme cold, moist or dry air can influence the effects of concrete floor moisture and/or condensation on the underside of the roof sheets.
- Absco Sheds and storage units are primarily used for storage of garden equipment such as lawnmowers, wheelbarrows, garden tools etc. Storage items that might be adversely affected by any of the above conditions may require additional protection such as being sealed or covered by plastic sheets and/or stacked above the concrete floor on timber slats.
- Waterproof sealants may be used to offer further protection where required around joins and screw fixings, as can rubber door seals and other products which are available from most hardware outlets.
- Placement of waterproof sealants (silicone) between the base of the shed and concrete slab is not recommended, as this process can have a reverse effect, preventing excess water from escaping, resulting with water accumulating and being trapped inside the shed.
- Absco accepts no responsibility for water entry, floor moisture, condensation or the condition of the Contents inside your Absco steel building arising from any of the pre-mentioned weather conditions.
- Absco accepts no responsibility for structural damage if doors were left open and/or not secured during a weather event.

Post-Installation Care

Clear final product of steel fillings (swarf) caused by drilling holes and tek screws.

Failure to do so may cause discolouration of surfaces and promote corrosion.

Refer to warranty for more details

Lifetime Warranty Statement



1. DEFINITIONS

In this document, capitalised terms have the following meaning:

- (a) "ABSCO" means John Scholtes Investments (No. 1) Pty Ltd trading as Absco Industries.
- (b) "Authorised Purpose" means for storage (other than storage of corrosive materials), and other activities typically expected of a non-habitable structure.
- (c) "Defect" means a defect in the design, workmanship, materials, or any other defect caused by the manufacturing process of the Product (including damaged or missing parts).
- (d) "Excluded Environment" means land located within 1km of:
 - (i) salt marine locations or other areas of marine influence;
 - (ii) severe industrial or other abnormally or highly corrosive environments;
 - (iii) areas not washed by rain;
 - (iv) a recognised flood, bushfire or earthquake zone; or
 - (v) areas with uncontrolled fill, unless an engineered foundation is constructed.
- (e) "Lifetime Warranty Period" means the period of 35 years, commencing on the day after the date of purchase of the Product.
- (f) "Lifetime Warranty Statement" means this 'Lifetime Warranty Statement' document.
- (g) "Parties" means ABSCO and You.
- (h) "Product" means any of following unless stated otherwise in the product description and/or the Product Guide for the Product:
 - (i) products which utilise ABSCO 'SNAP-TITE' technology, including but not limited to garden sheds, chicken coops, bike sheds and bin covers; and
 - (ii) all non-insulated large structures such as carports, awnings, shades and garages,but does not include any product stated to be in the "ABSCO Economy" range.
- (i) "Product Guide" means the guide for installation and maintenance of the Product produced by ABSCO.
- (j) "You" / "Your" means the customer who purchased or installed the Product, or the person who owns the land upon which the Product is installed but does not include a subsequent purchaser of the Product where the Product is moved to a different location to that originally installed.

2. ABSCO'S STRUCTURAL WARRANTY

- 2.1. ABSCO provides this warranty to You in relation to the Product. The warranty applies to all colours and finish variants of the Product manufactured by ABSCO and sold by authorised sellers of the Product in Australia or New Zealand.
- 2.2. Subject to the terms of this Lifetime Warranty Statement:
 - (a) ABSCO warrants that the Product will be free from Defects for the duration of the Lifetime Warranty Period; and
 - (b) where the Product contains a Defect, ABSCO will either repair or replace the Product, or provide You with monetary compensation for the Defect in accordance with clause 3.

3. WARRANTY CLAIM PROCEDURE

- 3.1. If, during the Lifetime Warranty Period, You believe the Product has a Defect, You must comply with the procedure set out in this clause 3.
- 3.2. Within 30 days of becoming aware of the Defect in the Product, You must notify ABSCO in writing of the alleged Defect ("Defect Notice") by email to admin@absco.com.au.
- 3.3. The Defect Notice must include:
 - (a) Your name, address and contact details;
 - (b) proof of purchase of the Product, including the colour and finish of the Product;
 - (c) the date and location of the installation of the Product and details of the contractor or installer of the Product;
 - (d) details of the alleged Defect in the Product, including but not limited to:
 - (i) a clear description of the alleged Defect;
 - (ii) the date the alleged Defect was first identified; and
 - (iii) any photographs and/or video footage of the alleged Defect.
- 3.4. As soon as reasonably practicable after receipt of the Defect Notice, ABSCO will contact You to investigate the alleged Defect. You must make the Product available to ABSCO and/or its authorised representatives for inspection and testing if so required.
- 3.5. A travel fee may apply if ABSCO and/or its authorised representatives are required to inspect the Product outside a capital metropolitan city area.
- 3.6. If ABSCO's investigations reveal a genuine Defect in the Product, ABSCO may elect to either:
 - (a) repair the Product;
 - (b) replace all or part of the Product; or
 - (c) refund all or part of the purchase price paid by You as compensation for the Defect in the Product.
- 3.7. ABSCO's election in clause 3.6 is at ABSCO's sole discretion.
- 3.8. If ABSCO elects to repair the Product, ABSCO will arrange for a qualified tradesperson to attend to the rectification of the Defect as soon as reasonably practicable. The cost of the repair will be borne by ABSCO.
- 3.9. If ABSCO elects to replace the Product:
 - (a) ABSCO will arrange for the replacement Product to be available for collection by You from the nearest ABSCO authorised reseller as soon as reasonably practicable;
 - (b) You may be required to return the alleged Defective parts or components to ABSCO; and
 - (c) You will be liable for the cost of disassembly and removal of the Product and assembly of the replacement Product.
- 3.10. If ABSCO elects to repair or replace the Product and the necessary parts or components are no longer manufactured or supplied by ABSCO, ABSCO may repair or replace the parts or components with parts or components of a similar quality, grade, composition and colour. You cannot object to such an alternative.
- 3.11. If ABSCO's investigations do not reveal a genuine Defect in the Product (including a defect which is not covered by this warranty), You agree to pay ABSCO's reasonable investigation costs.

4. WARRANTY LIMITATIONS / EXCLUSIONS

- 4.1. To the extent permitted by law, this warranty will not apply where:
- (a) the Product has been installed or used for a purpose that is not an Authorised Purpose;
 - (b) the Product has not been installed, assembled, maintained and/or operated in complete compliance with ABSCO's Product Guide;
 - (c) the Product has been used to store corrosive materials such as fertiliser or chlorine;
 - (d) the Product was installed in excess of 12 months after the purchase of the Product;
 - (e) the Product has not been installed in accordance with the relevant standards, codes and statutory regulations;
 - (f) the Defect is determined to have been caused by storm, wind, rain, earthquake, fire, snow or poor foundations;
 - (g) the Defect is, or is the result of, surface deterioration of panels caused by 'swarf' (tiny particles of steel debris left from cutting, grinding or drilling operations);
 - (h) the Product has been installed in an Excluded Environment;
 - (i) the Product has been subject to accident, negligence, alteration, abuse or misuse;
 - (j) the Defect is determined to be the result of overloading; or
 - (k) ABSCO determines that the Defect is the result of a failure of a third-party product.
- 4.2. You acknowledge that:
- (a) dimensions and colour of the Product are subject to normal manufacturing variations and tolerances, and that reasonable variances are not considered a Defect under this warranty; and
 - (b) this warranty is limited to the repair or replacement of Defects in the Product and does not extend to any other product or any other consequential or indirect damage incurred as a result of the Defect.
- 4.3. For the purpose of this warranty, the following matters are excluded from the definition of Defect:
- (a) general wear and tear which is reasonably expected to occur over the life of the Product;
 - (b) surface deterioration of panels caused by 'swarf' (tiny particles of steel debris left from cutting, grinding or drilling operations);
 - (c) condensation caused by weather conditions such as extreme heat or cold;
 - (d) defects in any fastening apparatus (screws, nuts, bolts, rivets, hasps or bolts);
 - (e) leaks caused by driving rain;
 - (f) improper installation, maintenance or handling of the Product;
 - (g) movement, distortion, collapse or settling of the ground or the supporting structure on which the Product is installed; or
 - (h) staining from foreign substances (including mould, mildew, dirt, grease, oil and any other substance).
- 4.4. To the extent permitted by law, ABSCO is not liable to compensate You for any:
- (a) increased costs or expenses;
 - (b) loss of profit, revenue, business, contracts or anticipated savings;
 - (c) loss or expense resulting from a claim by a third-party; or

- (d) special, indirect or consequential loss or damage of any nature whatsoever, arising from a Defect in the Product or ABSCO's repair or replacement of the Product under this warranty.

5. CONSUMER LAW

Australian Consumer Law

- 5.1. Clauses 5.2 to 5.3 apply where the Product was purchased in Australia.
- 5.2. The Product comes with guarantees that cannot be excluded under the Australian Consumer Law. You may be entitled to a replacement or refund for a major failure of the Product and compensation for any other reasonably foreseeable loss or damage. You may also be entitled to have the Product repaired or replaced if the Product fails to be of acceptable quality and the failure does not amount to a major failure.
- 5.3. The benefits of this Lifetime Warranty Statement are in addition to any rights and remedies imposed by Australian State and Federal legislation that cannot be excluded. Nothing in this Lifetime Warranty Statement is to be interpreted as excluding, restricting or modifying any State or Federal legislation applicable to the supply of goods and services which cannot be excluded, restricted or modified.

New Zealand Consumer Law

- 5.4. Clauses 5.5 to 5.6 apply where the Product was purchased in New Zealand.
- 5.5. This warranty is subject to the laws of New Zealand, including but not limited to the New Zealand Sale of Goods Act, the Consumer Guarantees Act and the Fair Trading Act.
- 5.6. The benefits of this Lifetime Warranty Statement are in addition to any rights and remedies imposed by New Zealand legislation that cannot be excluded. Nothing in this Lifetime Warranty Statement is to be interpreted as excluding, restricting or modifying any New Zealand legislation applicable to the supply of goods and services which cannot be excluded, restricted or modified.

6. NO REPRESENTATIONS / ENTIRE AGREEMENT

- 6.1. You agree and acknowledge that this Lifetime Warranty Statement contains the entire agreement between the Parties regarding the warranty provided by ABSCO to You in relation to the Product.
- 6.2. To the full extent permitted by law, this Lifetime Warranty Statement supersedes all other warranties of any kind, including whether express or implied by representations, statement, correspondence or other conditions such as merchantability or fitness for purpose.

7. REGISTRATION OF WARRANTY

- 7.1. Please ensure that You keep this Lifetime Warranty Statement in a safe place along with your proof of purchase of the Product.
- 7.2. To ensure ABSCO has a record of your warranty, You can register Your warranty online at <http://absco sheds.com.au/warranty-details/>.